

# Insulating Corrugated Tube

## Areas of application:


- e.g. engine compartment, body, vehicle interior, mechanical/apparatus engineering, switch cabinets.
- Protects vehicle leads from heat, moisture, chemicals and UV radiation.
- Used in conjunction with screw connectors and manifolds with degree of protection IP 67, it complies with the requirements for transporting hazardous goods acc. to **ADR/GGVS.**

## Material:

- Polyamide 6, halogen- and cadmium-free, self-extinguishing, UV-resistant.
- Working temperature range:  $-40^{\circ}\text{C}$  to  $+120^{\circ}\text{C}$  (for short periods up to  $+150^{\circ}\text{C}$ ).
- Colour: black.

## Chemical properties:

- Resistant to alcohols, greases, mineral oils, diesel fuels and petrol.

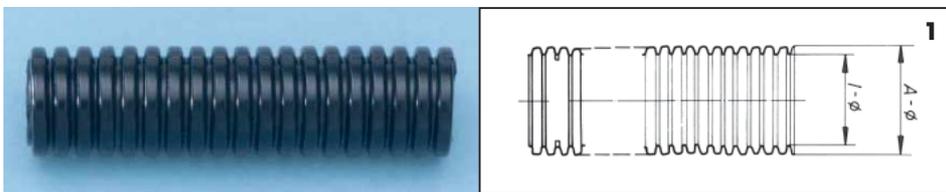


Nom. diam. mm	External Ø mm	Internal Ø mm	Art. No.	Pack/m
4.5	7.1	5.0	<b>0771 990 04</b>	100
8.5	11.7	8.4	<b>0771 990 08</b>	50
10	13.0	9.9	<b>0771 990 10</b>	10/50
13	15.8	12.7	<b>0771 990 13</b>	
17	21.2	16.6	<b>0771 990 17</b>	
22	25.4	21.3	<b>0771 990 22</b>	
32	38.4	32.5	<b>0771 990 32</b>	

Nom. diam. mm	External Ø mm	Internal Ø mm	Art. No.	Pack/m
4.5	7.1	5.0	<b>0771 990 004</b>	100
8.5	11.7	8.4	<b>0771 990 008</b>	50
10	13.0	9.9	<b>0771 990 010</b>	10/50
13	15.8	12.7	<b>0771 990 013</b>	
17	21.2	16.6	<b>0771 990 017</b>	
22	25.4	21.3	<b>0771 990 022</b>	

## Design: **slitted.**

- For retrofitting.
- Not acc. to ADR/GGVS.

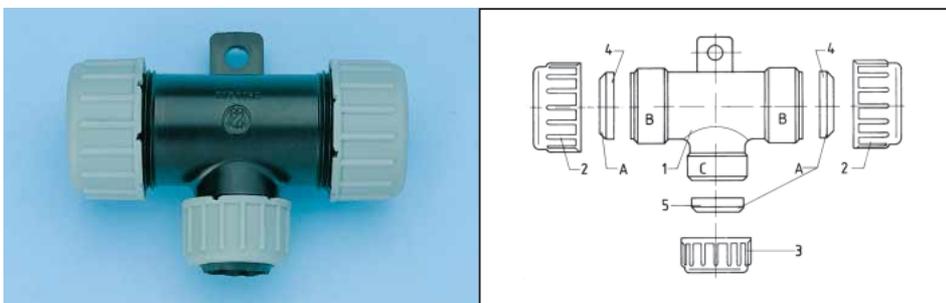

## Manifolds with screw connectors (tested acc. to ADR/GGVS)

Material: Screw connector: polycarbonate  
Union nut: polyamide

Working temperature range:  $-25^{\circ}\text{C}$  to  $+80^{\circ}\text{C}$ .

Degree of protection: IP 67  
Colour: black/grey.

Typ	Art.-Nr.	VE/St.
10 - 17 - 10	<b>0771 995 117</b>	1
22 - 17 - 22	<b>0771 995 272</b>	