

ELMO® CONNECTION TERMINAL, SCREWLESS COMPACT PLUS

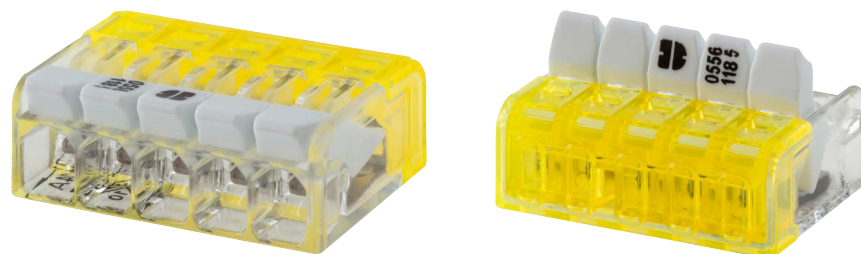


Illustration only



Wire cross section rigid min./max.	0.2-4 mm ²
Wire cross section flexible min./max.	0.34-4 mm ²
Nominal current	32 A
Wire-stripping length	11 mm
Nominal voltage	450 V
Max. ambient temperature	85 °C
T identification according to EN 60998	T85
Flammability	Self-extinguishing in accordance with UL94 V2
Material of the housing	Polycarbonate

Art. No.	0556 117 2	0556 117 3	0556 117 5
P. Qty.	100	100	50
Number of ladders	2 PCS	3 PCS	5 PCS
Length x width x height	20.5 x 13 x 10.5 mm	20.5 x 18.5 x 10.5 mm	20.5 x 29.8 x 10.5 mm
Colour	Transparent, Red	Transparent, Orange	Transparent, Yellow

Compatible with ORSY storage system

Related products	Art. No.
Automatic self-adjusting wire stripping pliers	0714 109 010
Stripping knife AM 280	0714 41 01
Two-pin voltage tester Multi-Tester Pro II LCD	0715 53 175

Rigid copper wires can be inserted without opening the more user-friendly activation lever.

Better grip

Grooved surface for improved grip for more user comfort

Test openings for voltage testers

Application area

Suitable for all types of copper wire (single, multi and fine-wire). Lamps, blinds, awnings, door and gate controllers, intercom systems, pumps, vehicle electrical systems etc.