


LOCK WASHER WITH RIGHT-ANGLE CROSS-SECTION, SHAPE B

DIN 127, steel, plain

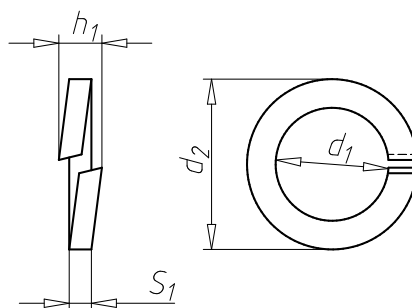

Material	Spring steel
Surface	Bare
RoHS-compliant	Yes
Form	B

Suitable for screw thread	Internal diameter (d_1)	Outer diameter (d_2)	Height (h_1)	Thickness (s_1)	Art. No.	P. Qty.
M2	2.1 mm	4.4 mm	1.0 mm	0.5 mm	0440 2	1000
M2.5	2.6 mm	5.2 mm	1.2 mm	0.6 mm	0440 25	2000
M3	3.1 mm	6.2 mm	1.6 mm	0.8 mm	0440 3	1000/10000
M4	4.1 mm	7.6 mm	1.8 mm	0.9 mm	0440 4	1000/10000
M5	5.1 mm	9.2 mm	2.4 mm	1.2 mm	0440 5	1000/10000
M6	6.1 mm	11.8 mm	3.2 mm	1.6 mm	0440 6	500/1000
M8	8.1 mm	14.8 mm	4.0 mm	2 mm	0440 8	500/1000/2500
M10	10.2 mm	18.1 mm	4.4 mm	2.2 mm	0440 10	500/1000/2000
M12	12.2 mm	21.1 mm	5.0 mm	2.5 mm	0440 12	500/1000
M14	14.2 mm	24.1 mm	6.0 mm	3 mm	0440 14	500
M16	16.2 mm	27.4 mm	7.0 mm	3.5 mm	0440 16	100/500
M18	18.2 mm	29.4 mm	7.0 mm	3.5 mm	0440 18	100/1000
M20	20.2 mm	33.6 mm	8.0 mm	4 mm	0440 20	50/100
M22	22.5 mm	35.9 mm	8.0 mm	4 mm	0440 22	50/250
M24	24.5 mm	40 mm	10.0 mm	5 mm	0440 24	50
M27	27.5 mm	43 mm	10.0 mm	5 mm	0440 27	50/100
M30	30.5 mm	48.2 mm	12.0 mm	6 mm	0440 30	50
M33	33 mm	55.2 mm	12.0 mm	6 mm	0440 33	50
M36	36.5 mm	58.2 mm	12.0 mm	6 mm	0440 36	25
M39	39.5 mm	61.2 mm	12.0 mm	6 mm	0440 39	25
M42	42.5 mm	68.2 mm	14.0 mm	7 mm	0440 42	25
M48	49 mm	75.0 mm	14.0 mm	7 mm	0440 48	50
M52	53 mm	83.0 mm	16.0 mm	8 mm	0440 52	50
M56	57 mm	87.0 mm	16.0 mm	8 mm	0440 55	50

Can be stored in ORSY® system

Notice

Only suitable for screws of strength class ≤ 5.8