


CABLE CONNECTOR, NON-INSULATED

Single-wire seals

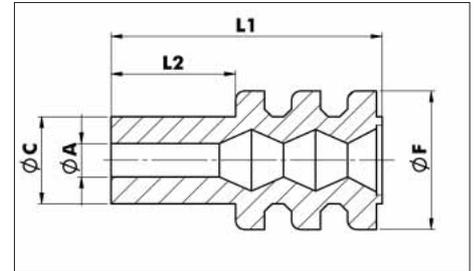

Drill dia. in mm	Insul. dia. A in mm	Dia. C in mm	Dia. F in mm	Length in mm	Wire type FLRY in mm ²	Color	Art. No.	P. Qty.
3.60	1.2 - 2.1	2.60	3.90	7.60	0.35 - 1.0	Gray	0558 991 403	100
4.00	1.7 - 2.1	2.90	4.50	7.00	0.75 - 1.0	Red	0558 991 404	
4.00	1.9 - 2.5	2.90	4.50	7.00	1.0 - 1.5	Yellow	0558 991 405	
5.15	1.2 - 2.1	3.40	5.65	7.50	0.35 - 1.0	Orange	0558 991 406	
5.15	1.7 - 2.4	3.40	6.10	7.80	0.75 - 1.5	Yellow	0558 991 41	
5.15	1.9 - 3.0	3.40	5.65	7.50	1.0 - 2.5	Red-brown	0558 991 407	
5.15	2.5 - 3.3	3.40	6.10	7.80	2.5	Red	0558 991 42	
5.40	1.4 - 2.1	3.40	6.00	7.50	0.5 - 1.0	Pure white	0558 991 408	
5.40	2.2 - 3.0	3.40	6.00	7.50	1.5 - 2.5	Orange	0558 991 409	
6.70	1.2 - 2.1	4.25	7.25	7.50	0.35 - 1.0	Red-brown	0558 991 410	
6.70	1.9 - 3.0	4.25	7.25	7.50	1.0 - 2.5	Gray	0558 991 411	
8.20	1.2 - 2.1	6.00	9.00	7.50	0.35 - 1.0	Rape yellow	0558 991 412	
8.20	1.9 - 3.0	6.00	9.00	7.50	1.0 - 2.5	Pure white	0558 991 413	
8.20	2.7 - 3.7	6.00	9.00	7.50	2.5 - 4.0	Red-brown	0558 991 414	
8.20	3.4 - 4.4	6.00	9.00	7.50	4.0 - 6.0	Pale green	0558 991 415	

AMP Micro Quadlok System (MQS) – Socket Contact/Pin Contact

with locking lug, * for single-wire seals

Image	mm ²	Seal dia. in mm	Pin dia. in mm	Material	Surface	Art. No.	P. Qty.
	0.25 - 0.5	-	0.63	CuNiSi	Sn (tinned)	0558 190 233	100
	0.25 - 0.5	2.60	0.63	CuNiSi	Sn (tinned)	0558 190 223*	
	0.25 - 0.5	-	0.63	CuNiSi	Sn (tinned), gold-plated	0558 190 234	
	0.25 - 0.5	2.60	0.63	CuNiSi	Sn (tinned), gold-plated	0558 190 224*	
	0.5 - 0.75	-	0.63	CuNiSi	Sn (tinned)	0558 190 23	
	0.5 - 0.75	2.60	0.63	CuNiSi	Sn (tinned)	0558 190 22*	
	0.5 - 0.75	-	0.63	CuNiSi	Sn (tinned), gold-plated	0558 190 232	
	0.5 - 0.75	2.60	0.63	CuNiSi	Sn (tinned), gold-plated	0558 190 222*	
	0.25 - 0.5	-	0.63	CuNiSi	Sn (tinned)	0558 190 703	
	0.25 - 0.5	2.60	0.63	CuNiSi	Sn (tinned)	0558 190 603*	
	0.25 - 0.5	-	0.63	CuNiSi	Sn (tinned), gold-plated	0558 190 704	
	0.25 - 0.5	2.60	0.63	CuNiSi	Sn (tinned), gold-plated	0558 190 604*	
	0.5 - 0.75	-	0.63	CuNiSi	Sn (tinned)	0558 190 70	
	0.5 - 0.75	2.60	0.63	CuNiSi	Sn (tinned)	0558 190 60*	
	0.5 - 0.75	-	0.63	CuNiSi	Sn (tinned), gold-plated	0558 190 702	
	0.5 - 0.75	2.60	0.63	CuNiSi	Sn (tinned), gold-plated	0558 190 602*	

Storable in [®]ORSY

Additional recommended products:

Releasing Tool

Art. No. 0713 558 201

Single-Wire Seals

Art. No. 0558 991 403