
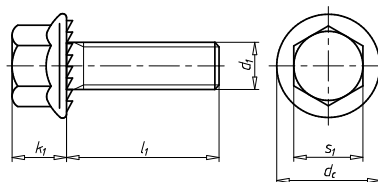


HEXAGON HEAD SERRATED SCREW WITH FLANGE

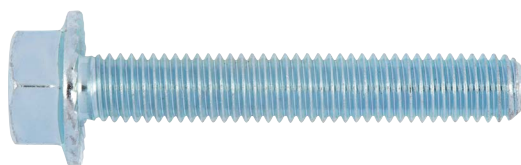

W-0274 steel 8.8, galvanised, blue passivated (A2K)

- The locking teeth push into the material of the component that is being screwed and block the inward unlocking torque in the unscrewing direction
- The material that is being screwed must demonstrate a significantly lower hardness in comparison to the screw (surface hardness of the screw: min. 250 HV)
- Suitable for short clamping lengths in particular

Standards	WN 274
Material	Steel
Property class	8.8
Surface	Zinc plated
Locking device operating principle	Serration
Locking function	Locking against self-loosening by mechanical interlocking
Head type	Hexagon head with flange
Drive type	Outer hexagon
Thread type	Metric thread
Thread format	Standard metric thread
Thread design	Full thread
RoHS-compliant	Yes

Thread type x nominal diameter (d _f)	Length (l _f)	Head diameter (d _c)	Head height (k _f)	External drive (s _f)	Pitch	Art. No.	P. Qty.
M4	16 mm	10 mm	4.2 mm	WS7	0.7 mm	0274 04 16	100
M4	20 mm	10 mm	4.2 mm	WS7	0.7 mm	0274 04 20	100
M5	8 mm	11.8 mm	5.4 mm	WS8	0.8 mm	0274 05 8	100
M5	10 mm	11.8 mm	5.4 mm	WS8	0.8 mm	0274 05 10	100
M5	12 mm	11.8 mm	5.4 mm	WS8	0.8 mm	0274 05 12	100
M5	16 mm	11.8 mm	5.4 mm	WS8	0.8 mm	0274 05 16	100
M5	20 mm	11.8 mm	5.4 mm	WS8	0.8 mm	0274 05 20	100
M5	25 mm	11.8 mm	5.4 mm	WS8	0.8 mm	0274 05 25	100
M5	30 mm	11.8 mm	5.4 mm	WS8	0.8 mm	0274 05 30	100
M6	10 mm	14.2 mm	6.6 mm	WS10	1 mm	0274 06 10	100
M6	12 mm	14.2 mm	6.6 mm	WS10	1 mm	0274 06 12	100
M6	16 mm	14.2 mm	6.6 mm	WS10	1 mm	0274 06 16	100
M6	20 mm	14.2 mm	6.6 mm	WS10	1 mm	0274 06 20	100
M6	25 mm	14.2 mm	6.6 mm	WS10	1 mm	0274 06 25	100
M6	30 mm	14.2 mm	6.6 mm	WS10	1 mm	0274 06 30	100
M6	35 mm	14.2 mm	6.6 mm	WS10	1 mm	0274 06 35	100
M6	40 mm	14.2 mm	6.6 mm	WS10	1 mm	0274 06 40	100
M6	45 mm	14.2 mm	6.6 mm	WS10	1 mm	0274 06 45	100
M6	50 mm	14.2 mm	6.6 mm	WS10	1 mm	0274 06 50	100
M8	12 mm	17.9 mm	8.1 mm	WS13	1.25 mm	0274 08 12	100
M8	16 mm	17.9 mm	8.1 mm	WS13	1.25 mm	0274 08 16	100
M8	20 mm	17.9 mm	8.1 mm	WS13	1.25 mm	0274 08 20	100
M8	25 mm	17.9 mm	8.1 mm	WS13	1.25 mm	0274 08 25	100
M8	30 mm	17.9 mm	8.1 mm	WS13	1.25 mm	0274 08 30	100
M8	35 mm	17.9 mm	8.1 mm	WS13	1.25 mm	0274 08 35	100
M8	40 mm	17.9 mm	8.1 mm	WS13	1.25 mm	0274 08 40	100
M8	50 mm	17.9 mm	8.1 mm	WS13	1.25 mm	0274 08 50	100
M8	55 mm	17.9 mm	8.1 mm	WS13	1.25 mm	0274 08 55	100