


THREADED FITTING



Compatible with ORSY storage system

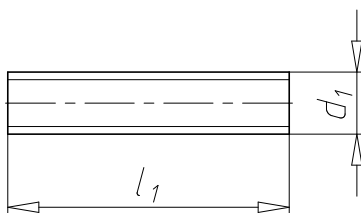

DIN 976-1 (shape A), galvanised steel 4.8, blue passivated (A2K)

Thread type x nominal diameter (d ₁)	Length (l ₁)	Art. No.	P. Qty.
M6	190 mm	0958 96 190	50
M6	200 mm	0958 96 200	50
M6	204 mm	0958 96 204	100
M6	230 mm	0958 96 230	100
M6	440 mm	0958 96 440	100
M8	20 mm	0958 98 20	100
M8	25 mm	0958 98 25	100
M8	30 mm	0958 98 30	100
M8	35 mm	0958 98 35	100
M8	40 mm	0958 98 40	100
M8	45 mm	0958 98 45	100
M8	50 mm	0958 98 50	100
M8	55 mm	0958 98 55	100
M8	60 mm	0958 98 60	100
M8	70 mm	0958 98 70	100
M8	80 mm	0958 98 80	50
M8	90 mm	0958 98 90	50
M8	100 mm	0958 98 100	50
M8	110 mm	0958 98 110	25
M8	115 mm	0958 98 115	25
M8	120 mm	0958 98 120	25
M8	130 mm	0958 98 130	25
M8	140 mm	0958 98 140	25
M8	145 mm	0958 98 145	25
M8	150 mm	0958 98 150	25
M8	155 mm	0958 98 155	100
M8	160 mm	0958 98 160	25
M8	165 mm	0958 98 165	25
M8	170 mm	0958 98 170	25
M8	180 mm	0958 98 180	25
M8	190 mm	0958 98 190	25
M8	195 mm	0958 98 195	50
M8	200 mm	0958 98 200	25
M8	210 mm	0958 98 210	50
M8	220 mm	0958 98 220	50
M8	225 mm	0958 98 225	50
M8	230 mm	0958 98 230	100
M8	235 mm	0958 98 235	50
M8	240 mm	0958 98 240	40
M8	245 mm	0958 98 245	100
M8	260 mm	0958 98 260	50
M8	265 mm	0958 98 265	50
M8	290 mm	0958 98 290	50
M8	300 mm	0958 98 300	100
M8	305 mm	0958 98 305	50