
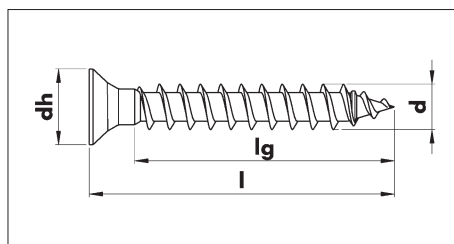


ASSY® 3.0


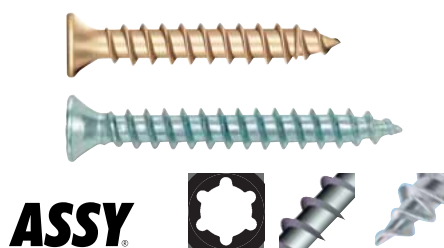


Piano hinge screws

- Asymmetrical single thread
- Small countersunk head, dia. 5.0 mm
- Patented in accordance with EP0504782

Dia. in mm	L in mm	lg in mm	dh in mm	Surface	Drive	Art. No.	P. Qty.
3.0	10	7	5.0	brass-plated	AW® 10	0168 130 010	1000
	12	9				0168 130 012	
	16	13				0168 130 016	
	20	17				0168 130 020	
	25	22				0168 130 025	
	12	9		galvanized blue passivated		0168 330 012	
	16	13				0168 330 016	
	20	17				0168 330 020	
	25	22				0168 330 025	

Storable in ORSY®

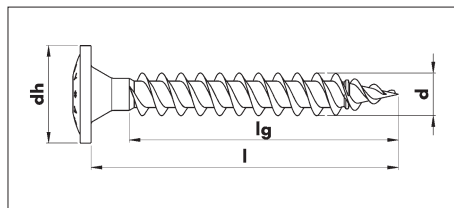
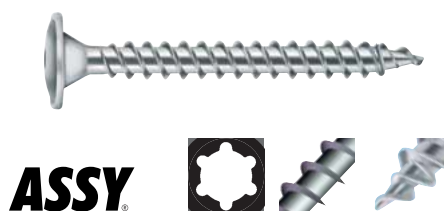


Back wall screws

- Spec. head shape with large contact surface
- For wooden handles use only 4 mm dia.
- Patented in accordance with EP0504782

Dia. in mm	L in mm	lg in mm	dh in mm	Surface	Drive	Art. No.	P. Qty.
3.0	20	17	7.8	galvanized, blue passivated	AW® 10	0167 130 020	1000
	25	22				0167 130 025	
	30	27				0167 130 030	
	35	32				0167 130 035	
4.0	30	27	9.3		AW® 20	0167 140 030	500
	35	32				0167 140 035	
	40	37				0167 140 040	
	45	42				0167 140 045	

Storable in ORSY®

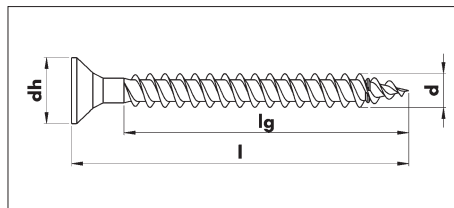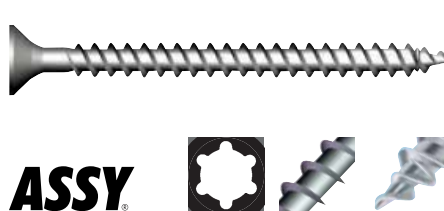

roller-sorted

- Spec. tested screws for use in machines
- Patented in accordance with EP0504782

Dia. in mm	L in mm	lg in mm	dh in mm	Drive	Art. No. galvanized, blue passivated	P. Qty.
3.5	30	25	6.8	AW® 10	0170 435 030	3000
	35	30			0170 435 035	

Storable in ORSY®



ETA-11/0190