


## MULTIPLE PLUG-IN HOUSING

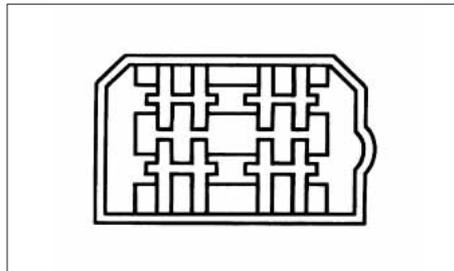

**For push-on lugs and push-on receptacles.**

- For plugging width 6.3 x 0.8 mm.
- Material: Polyamide, natural.
- Temperature resistance: -40°C to +80°C.

Push-on connections Qty. / Fig.	Art. No.	P. Qty.
1 / -	<b>0555 100 1</b>	25
2 / =	<b>0555 100 2</b>	25
2 / 1 -	<b>0555 100 22</b>	25
3 / = 1	<b>0555 100 3</b>	25
4 / = =	<b>0555 100 4</b>	25
6 / = = =	<b>0555 100 6</b>	25
8 / = = = =	<b>0555 100 8</b>	25

Can be stored in ORSY®




**Push-on lugs 6.3 x 0.8 mm**

- With locking lug.
- Tinned.

mm <sup>2</sup>	Art. No.	P. Qty.
0.5 - 1.0	<b>0558 996 0</b>	100
1.5 - 2.5	<b>0558 991 8</b>	100
4.0 - 6.0	<b>0558 996 3</b>	100

Can be stored in ORSY®

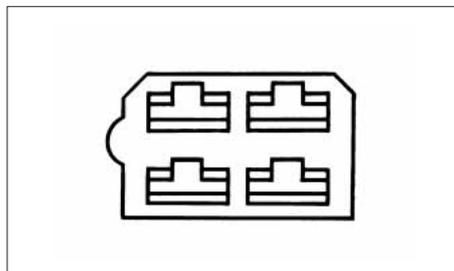

Push-on connections Qty. / Fig.	Art. No.	P. Qty.
1 / -	<b>0555 100 11</b>	25
2 / =	<b>0555 100 21</b>	25
2 / 1 -	<b>0555 100 23</b>	25
3 / = 1	<b>0555 100 31</b>	25
4 / = =	<b>0555 100 41</b>	25
6 / = = =	<b>0555 100 61</b>	25
8 / = = = =	<b>0555 100 81</b>	25

Can be stored in ORSY®



**Push-on receptacles 6.3 x 0.8 mm**

- With locking lug.
- Tinned.

mm <sup>2</sup>	Art. No.	P. Qty.
0.5 - 1.0	<b>0558 991 6</b>	100
1.5 - 2.5	<b>0558 991 7</b>	100
4.0 - 6.0	<b>0558 996 2</b>	100

Can be stored in ORSY®



**3x plug-in housing for main headlight H4**

- Incl. Push-on receptacles
- Art. No. 0558 190 30.

Can be stored in ORSY®

**Art. No. 0555 101 10**  
P. Qty. 10



**POS Lock insulating sleeve**

- Color: black.
- Material: nylon.
- For push-on receptacles
- Art. No. 0558 160 71 to
- Art. No. 0558 160 79.

Can be stored in ORSY®

**Art. No. 0558 101 1**  
P. Qty. 10