
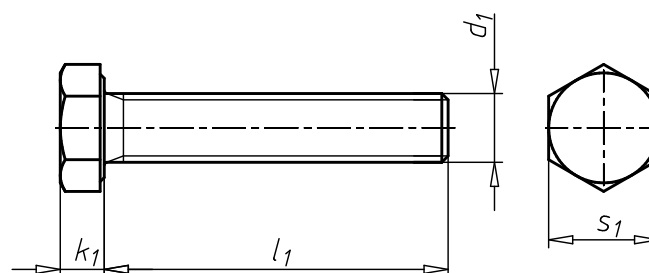


Hexagonal bolt with thread up to the head

ISO 4017, steel 10.9, galvanised, blue passivated (A2K)

Standards	ISO 4017
Material	Steel
Property class	10.9
Surface	Zinc plated
RoHS-compliant	Yes

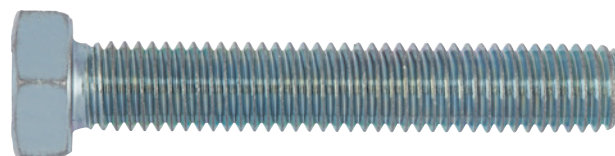

Thread type x nominal diameter (d ₁)	Length (l ₁)	Head height (k ₁)	External drive (s ₁)	Art. no.	P. Qty.
M4	6 mm	2.8 mm	WS7	0107 04 6	100
M4	10 mm	2.8 mm	WS7	0107 04 10	1
M4	14 mm	2.8 mm	WS7	0107 04 14	500
M4	16 mm	2.8 mm	WS7	0107 04 16	500
M4	20 mm	2.8 mm	WS7	0107 04 20	500
M4	25 mm	2.8 mm	WS7	0107 04 25	500
M4	30 mm	2.8 mm	WS7	0107 04 30	500
M4	35 mm	2.8 mm	WS7	0107 04 35	500
M4	40 mm	2.8 mm	WS7	0107 04 40	500
M4	45 mm	2.8 mm	WS7	0107 04 45	500
M4	50 mm	2.8 mm	WS7	0107 04 50	500
M4	60 mm	2.8 mm	WS7	0107 04 60	200
M5	10 mm	3.5 mm	WS8	0107 05 10	500
M5	12 mm	3.5 mm	WS8	0107 05 12	500
M5	14 mm	3.5 mm	WS8	0107 05 14	500
M5	16 mm	3.5 mm	WS8	0107 05 16	200
M5	20 mm	3.5 mm	WS8	0107 05 20	500
M5	25 mm	3.5 mm	WS8	0107 05 25	500
M5	30 mm	3.5 mm	WS8	0107 05 30	500
M5	35 mm	3.5 mm	WS8	0107 05 35	200
M5	40 mm	3.5 mm	WS8	0107 05 40	200
M5	45 mm	3.5 mm	WS8	0107 05 45	200
M5	50 mm	3.5 mm	WS8	0107 05 50	500
M5	60 mm	3.5 mm	WS8	0107 05 60	200
M5	65 mm	3.5 mm	WS8	0107 05 65	100
M5	70 mm	3.5 mm	WS8	0107 05 70	1
M6	8 mm	4 mm	WS10	0107 06 8	100
M6	10 mm	4 mm	WS10	0107 06 10	500
M6	12 mm	4 mm	WS10	0107 06 12	500
M6	14 mm	4 mm	WS10	0107 06 14	500
M6	16 mm	4 mm	WS10	0107 06 16	500
M6	18 mm	4 mm	WS10	0107 06 18	500

Thread type x nominal diameter (d ₁)	Length (l ₁)	Head height (k ₁)	External drive (s ₁)	Art. no.	P. Qty.
M6	20 mm	4 mm	WS10	0107 06 20	500
M6	22 mm	4 mm	WS10	0107 06 22	500
M6	25 mm	4 mm	WS10	0107 06 25	500
M6	30 mm	4 mm	WS10	0107 06 30	500
M6	35 mm	4 mm	WS10	0107 06 35	200
M6	40 mm	4 mm	WS10	0107 06 40	200
M6	45 mm	4 mm	WS10	0107 06 45	200
M6	50 mm	4 mm	WS10	0107 06 50	100
M6	55 mm	4 mm	WS10	0107 06 55	100
M6	60 mm	4 mm	WS10	0107 06 60	200
M6	65 mm	4 mm	WS10	0107 06 65	100
M6	70 mm	4 mm	WS10	0107 06 70	200
M6	80 mm	4 mm	WS10	0107 06 80	100
M6	85 mm	4 mm	WS10	0107 06 85	200
M6	90 mm	4 mm	WS10	0107 06 90	100
M6	100 mm	4 mm	WS10	0107 06 100	100
M6	120 mm	4 mm	WS10	0107 06 120	100
M8	10 mm	5.3 mm	WS13	0107 08 10	200
M8	12 mm	5.3 mm	WS13	0107 08 12	500
M8	14 mm	5.3 mm	WS13	0107 08 14	200
M8	16 mm	5.3 mm	WS13	0107 08 16	200
M8	18 mm	5.3 mm	WS13	0107 08 18	200
M8	20 mm	5.3 mm	WS13	0107 08 20	200
M8	22 mm	5.3 mm	WS13	0107 08 22	200
M8	25 mm	5.3 mm	WS13	0107 08 25	200
M8	30 mm	5.3 mm	WS13	0107 08 30	200
M8	35 mm	5.3 mm	WS13	0107 08 35	200
M8	40 mm	5.3 mm	WS13	0107 08 40	100
M8	45 mm	5.3 mm	WS13	0107 08 45	200
M8	50 mm	5.3 mm	WS13	0107 08 50	200
M8	55 mm	5.3 mm	WS13	0107 08 55	100
M8	60 mm	5.3 mm	WS13	0107 08 60	200
M8	65 mm	5.3 mm	WS13	0107 08 65	100
M8	70 mm	5.3 mm	WS13	0107 08 70	200
M8	75 mm	5.3 mm	WS13	0107 08 75	100
M8	80 mm	5.3 mm	WS13	0107 08 80	200
M8	90 mm	5.3 mm	WS13	0107 08 90	200
M8	100 mm	5.3 mm	WS13	0107 08 100	100
M8	130 mm	5.3 mm	WS13	0107 08 130	25
M10	16 mm	6.4 mm	WS16	0107 910 16	200
M10	20 mm	6.4 mm	WS16	0107 910 20	200
M10	30 mm	6.4 mm	WS16	0107 910 30	200
M10	35 mm	6.4 mm	WS16	0107 910 35	200
M10	40 mm	6.4 mm	WS16	0107 910 40	100
M10	50 mm	6.4 mm	WS16	0107 910 50	100
M10	60 mm	6.4 mm	WS16	0107 910 60	50/100
M10	65 mm	6.4 mm	WS16	0107 910 65	50/150
M10	80 mm	6.4 mm	WS16	0107 910 80	100
M10	90 mm	6.4 mm	WS16	0107 910 90	100
M10	100 mm	6.4 mm	WS16	0107 910 100	10
M10	110 mm	6.4 mm	WS16	0107 910 110	10
M12	25 mm	7.5 mm	WS18	0107 912 25	100
M12	30 mm	7.5 mm	WS18	0107 912 30	100
M12	35 mm	7.5 mm	WS18	0107 912 35	100

Thread type x nominal diameter (d ₁)	Length (l ₁)	Head height (k ₁)	External drive (s ₁)	Art. no.	P. Qty.
M12	40 mm	7.5 mm	WS18	0107 912 40	100
M12	50 mm	7.5 mm	WS18	0107 912 50	100
M12	55 mm	7.5 mm	WS18	0107 912 55	100
M12	60 mm	7.5 mm	WS18	0107 912 60	100
M12	65 mm	7.5 mm	WS18	0107 912 65	50
M12	90 mm	7.5 mm	WS18	0107 912 90	50
M12	100 mm	7.5 mm	WS18	0107 912 100	25
M14	35 mm	8.8 mm	WS21	0107 914 35	100
M14	40 mm	8.8 mm	WS21	0107 914 40	100
M16	20 mm	10 mm	WS24	0107 016 20	50
M16	25 mm	10 mm	WS24	0107 016 25	50
M16	30 mm	10 mm	WS24	0107 016 30	50
M16	35 mm	10 mm	WS24	0107 016 35	50
M16	40 mm	10 mm	WS24	0107 016 40	50
M16	45 mm	10 mm	WS24	0107 016 45	50
M16	50 mm	10 mm	WS24	0107 016 50	50
M16	55 mm	10 mm	WS24	0107 016 55	50
M16	60 mm	10 mm	WS24	0107 016 60	50
M16	65 mm	10 mm	WS24	0107 016 65	25
M16	70 mm	10 mm	WS24	0107 016 70	50
M16	75 mm	10 mm	WS24	0107 016 75	25
M16	80 mm	10 mm	WS24	0107 016 80	25
M16	85 mm	10 mm	WS24	0107 016 85	50
M16	95 mm	10 mm	WS24	0107 016 95	1
M16	100 mm	10 mm	WS24	0107 016 100	25
M16	110 mm	10 mm	WS24	0107 016 110	25
M16	120 mm	10 mm	WS24	0107 016 120	25
M16	130 mm	10 mm	WS24	0107 016 130	25
M16	140 mm	10 mm	WS24	0107 016 140	25
M16	170 mm	10 mm	WS24	0107 016 170	10
M16	190 mm	10 mm	WS24	0107 016 190	5
M16	300 mm	10 mm	WS24	0107 016 300	1
M18	45 mm	11.5 mm	WS27	0107 018 45	50
M18	50 mm	11.5 mm	WS27	0107 018 50	50
M18	60 mm	11.5 mm	WS27	0107 018 60	50
M18	65 mm	11.5 mm	WS27	0107 018 65	25
M18	80 mm	11.5 mm	WS27	0107 018 80	25
M18	90 mm	11.5 mm	WS27	0107 018 90	25
M18	100 mm	11.5 mm	WS27	0107 018 100	25
M18	110 mm	11.5 mm	WS27	0107 018 110	50
M20	35 mm	12.5 mm	WS30	0107 020 35	50
M20	40 mm	12.5 mm	WS30	0107 020 40	25
M20	45 mm	12.5 mm	WS30	0107 020 45	25
M20	50 mm	12.5 mm	WS30	0107 020 50	25
M20	55 mm	12.5 mm	WS30	0107 020 55	25
M20	60 mm	12.5 mm	WS30	0107 020 60	25
M20	65 mm	12.5 mm	WS30	0107 020 65	25
M20	70 mm	12.5 mm	WS30	0107 020 70	25
M20	75 mm	12.5 mm	WS30	0107 020 75	25
M20	80 mm	12.5 mm	WS30	0107 020 80	25
M20	90 mm	12.5 mm	WS30	0107 020 90	25
M20	100 mm	12.5 mm	WS30	0107 020 100	25
M20	110 mm	12.5 mm	WS30	0107 020 110	25
M20	120 mm	12.5 mm	WS30	0107 020 120	25

Thread type x nominal diameter (d ₁)	Length (l ₁)	Head height (k ₁)	External drive (s ₁)	Art. no.	P. Qty.
M20	130 mm	12.5 mm	WS30	0107 020 130	25
M20	150 mm	12.5 mm	WS30	0107 020 150	25
M20	160 mm	12.5 mm	WS30	0107 020 160	10
M20	180 mm	12.5 mm	WS30	0107 020 180	25
M24	25 mm	15 mm	WS36	0107 024 25	25
M24	30 mm	15 mm	WS36	0107 024 30	10
M24	40 mm	15 mm	WS36	0107 024 40	25
M24	45 mm	15 mm	WS36	0107 024 45	10
M24	50 mm	15 mm	WS36	0107 024 50	25
M24	55 mm	15 mm	WS36	0107 024 55	25
M24	60 mm	15 mm	WS36	0107 024 60	25
M24	65 mm	15 mm	WS36	0107 024 65	25
M24	70 mm	15 mm	WS36	0107 024 70	25
M24	75 mm	15 mm	WS36	0107 024 75	25
M24	80 mm	15 mm	WS36	0107 024 80	25
M24	85 mm	15 mm	WS36	0107 024 85	50
M24	90 mm	15 mm	WS36	0107 024 90	10
M24	100 mm	15 mm	WS36	0107 024 100	10
M24	110 mm	15 mm	WS36	0107 024 110	10
M24	120 mm	15 mm	WS36	0107 024 120	10
M24	130 mm	15 mm	WS36	0107 024 130	10
M24	140 mm	15 mm	WS36	0107 024 140	10
M24	150 mm	15 mm	WS36	0107 024 150	10
M24	160 mm	15 mm	WS36	0107 024 160	10
M24	180 mm	15 mm	WS36	0107 024 180	10
M24	200 mm	15 mm	WS36	0107 024 200	10
M24	220 mm	15 mm	WS36	0107 024 220	10
M24	300 mm	15 mm	WS36	0107 024 300	10
M27	60 mm	17 mm	WS41	0107 027 60	10
M27	65 mm	17 mm	WS41	0107 027 65	10
M27	75 mm	17 mm	WS41	0107 027 75	10
M27	80 mm	17 mm	WS41	0107 027 80	10
M27	90 mm	17 mm	WS41	0107 027 90	10
M27	100 mm	17 mm	WS41	0107 027 100	10
M27	130 mm	17 mm	WS41	0107 027 130	5
M27	140 mm	17 mm	WS41	0107 027 140	1
M27	200 mm	17 mm	WS41	0107 027 200	10
M30	40 mm	18.7 mm	WS46	0107 030 40	10
M30	60 mm	18.7 mm	WS46	0107 030 60	10
M30	65 mm	18.7 mm	WS46	0107 030 65	10
M30	70 mm	18.7 mm	WS46	0107 030 70	10
M30	80 mm	18.7 mm	WS46	0107 030 80	10
M30	85 mm	18.7 mm	WS46	0107 030 85	10
M30	90 mm	18.7 mm	WS46	0107 030 90	10
M30	100 mm	18.7 mm	WS46	0107 030 100	10
M30	110 mm	18.7 mm	WS46	0107 030 110	10
M30	120 mm	18.7 mm	WS46	0107 030 120	10
M30	130 mm	18.7 mm	WS46	0107 030 130	10
M30	140 mm	18.7 mm	WS46	0107 030 140	20
M30	150 mm	18.7 mm	WS46	0107 030 150	10
M30	160 mm	18.7 mm	WS46	0107 030 160	10
M30	190 mm	18.7 mm	WS46	0107 030 190	10
M30	200 mm	18.7 mm	WS46	0107 030 200	10
M33	60 mm	21 mm	WS50	0107 033 60	10

Thread type x nominal diameter (d ₁)	Length (l ₁)	Head height (k ₁)	External drive (s ₁)	Art. no.	P. Qty.
M36	70 mm	22.5 mm	WS55	0107 036 70	5
M36	90 mm	22.5 mm	WS55	0107 036 90	5
M36	100 mm	22.5 mm	WS55	0107 036 100	10
M36	120 mm	22.5 mm	WS55	0107 036 120	10
M36	150 mm	22.5 mm	WS55	0107 036 150	1
M36	160 mm	22.5 mm	WS55	0107 036 160	10
M36	170 mm	22.5 mm	WS55	0107 036 170	10
M36	200 mm	22.5 mm	WS55	0107 036 200	1
M36	250 mm	22.5 mm	WS55	0107 036 250	1
M42	110 mm	26 mm	WS65	0107 042 110	5

Notice

ISO 4017 replaces DIN 933 | There is some similarity | Nominal dimensions extended | Width across flats changed for M10, M12, M14 and M22.