

d x l in mm	Drill hole dia. in mm	Clamping range in mm	d _k in mm	k in mm	d _m in mm	Shear fract. load N	Tens. fract. load N	Art. No.	P. Qty.
3.2 x 7.5	3.3	1.5 – 3.0	6.0	0.9	1.7	1,170	1,350	0937 232 75	500
3.2 x 9.0	3.3	3.0 – 4.5						0937 232 90	500
3.2 x 10.5	3.3	4.5 – 6.0						0937 232 105	500
4.0 x 9.5	4.1	2.5 – 4.5	8.0	1.3	2.2	1,660	2,250	0937 240 95	500
4.0 x 11.0	4.1	4.5 – 6.5						0937 240 110	500
4.0 x 12.5	4.1	6.5 – 8.0						0937 240 125	500
4.8 x 11.0	4.9	4.5 – 6.0	9.5	1.5	2.7	2,330	3,170	0937 248 110	500
4.8 x 12.5	4.9	6.0 – 7.5						0937 248 125	500
4.8 x 14.0	4.9	7.5 – 9.0						0937 248 140	500
4.8 x 15.5	4.9	9.0 – 10.5						0937 248 155	500
4.8 x 19.5	4.9	10.5 – 14.0						0937 248 195	250

Bucket Blind Rivets



120° countersunk head

Sleeve: Aluminum
Pin: Bare steel

Countersunk head, bucket-shaped rivet shank, air- and spray water-proof riveting.

Special riveting range

- Captive rivet pin head.
- Very thick rivet sleeve wall thanks to a thinner pin, which makes for high shear strength.

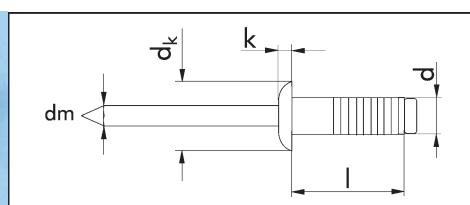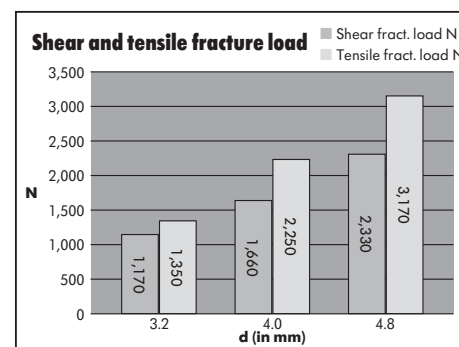

d x l in mm	Drill hole dia. in mm	Clamping range in mm	d _k in mm	k in mm	d _m app. in mm	Shear fract. load N	Tens. fract. load N	Art. No.	P. Qty.
4.0 x 10.0	4.3	max. 6.0	8.0	1.7	2.2	885	1,410	0937 940 10	500
4.0 x 12.0	4.3	max. 8.0	8.0	1.7	2.2	885	1,410	0937 940 12	500
4.0 x 16.0	4.3	max. 12.0	8.0	1.7	2.2	885	1,410	0937 940 16	500
4.8 x 10.0	5.1	max. 6.0	9.5	2.0	2.6	1,185	1,575	0937 948 10	500
4.8 x 12.0	5.1	max. 8.0	9.5	2.0	2.6	1,185	1,575	0937 948 12	500
4.8 x 14.0	5.1	max. 10.0	9.5	2.0	2.6	1,185	1,575	0937 948 14	500
4.8 x 25.0	5.1	max. 21.0	9.5	2.0	2.6	1,185	1,575	0937 948 25	250

Blind Rivets

with grooved rivet shank

Sleeve: Aluminum
Pin: Galvanized steel, blue passivated (A2K)

- Especially well-suited for attachment in blind holes.
- Quick attachment in solid materials such as wood and plastic.
- Good anchoring in the material, which results in a strong rivetconnection.

