


HEAT-SHRUNK END CAPS

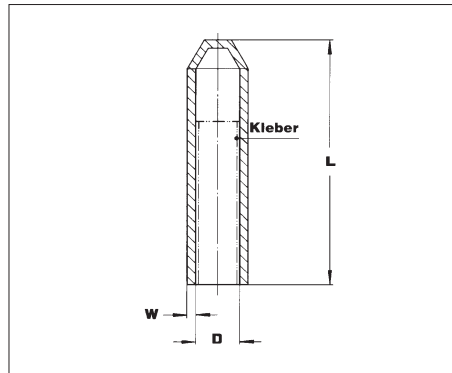

Cable dia. in mm	D in mm	D shrunk in mm	L shrunk, approx., in mm	W shrunk, approx., in mm	Art. No.	P. Qty.
4 - 10	10	4	38	2.0	0975 301 101	10
7.5 - 20	20	7.5	55	2.8	0975 301 102	5
15 - 35	35	15	90	3.2	0975 301 103	3
25 - 55	55	25	143	3.9	0975 301 104	3
32 - 75	75	32	150	3.3	0975 301 105	1
45 - 100	100	45	162	3.8	0975 301 106	1
70 - 120	120	70	145	3.8	0975 301 107	1

Inside coated with hot-melt glue


- Color: Black.
- UV-resistant, resistant to environmental influences.

Applications:

For sealing cable ends, line ends and pipes against moisture during storage and transport.



HEAT-SHRUNK WALL DUCTS

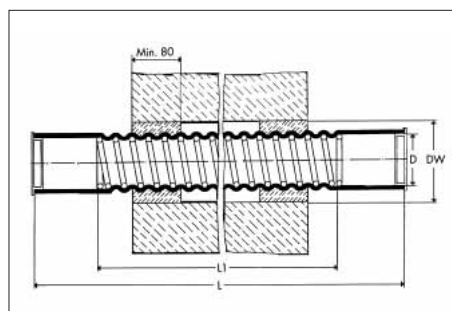

Cable dia. in mm	D in mm	D shrunk in mm	L approx. in mm	L1 approx. in mm	Art. No.	P. Qty.
8 - 14	16	8	700	520	0975 304 8	1
12 - 25	28	10	700	520	0975 304 10	1
18 - 36	41	16	800	620	0975 304 15	1

Hose ends coated with sealing compound.

- Color: Black.
- Longitudinally watertight and gas-tight to 0.1 MPa.
- In thicker walls, two wall ducts can be connected to each other.

Applications:

Routing cables insulated with plastic and paper through concrete and masonry.

