
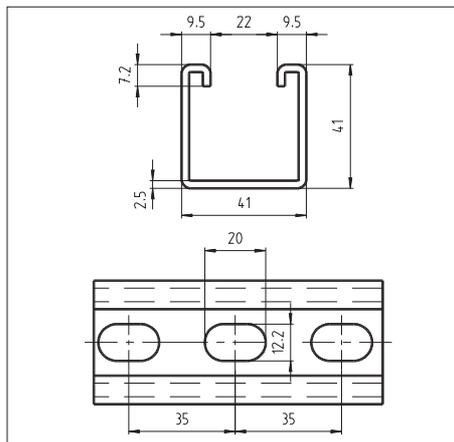
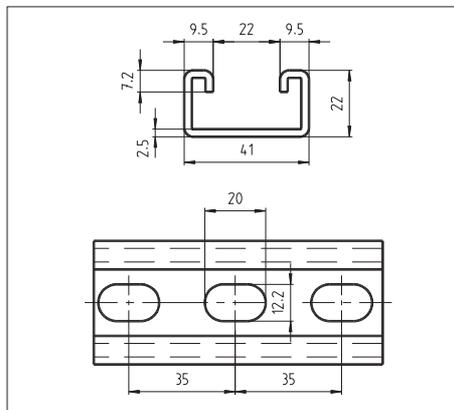


VARIFIX® C-ASSEMBLY RAIL

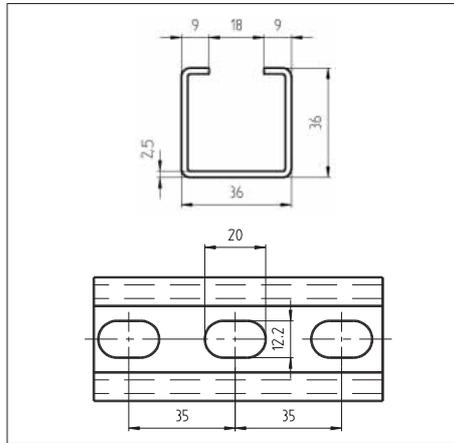

Rail profile	Length mm	Art. no.	PU m
36/36/2.5	2000	0862 001 004	10
36/36/2.5	3000	0862 001 224	15
36/36/2.5	6000	0862 001 230	24


Hot-dip galvanised version

Rail profile	Length mm	Art. no.	PU m
36/36/2.5	6000	0862 001 438	24

Rail profile	Length mm	Art. no.	PU m
41/22/2.5	2000	0862 001 005	10
41/22/2.5	3000	0862 001 225	15
41/22/2.5	6000	0862 001 229	24

Rail profile	Length mm	Art. no.	PU m
41/22/1.8	3000	0862 001 233	15
41/22/1.8	6000	0862 001 235	24

Rail profile	Length mm	Art. no.	PU m
41/41/2.5	2000	0862 001 006	10
41/41/2.5	3000	0862 001 226	15
41/41/2.5	6000	0862 001 231	24



Fire protection
test report no. 3612/5526

Fire-protection tested mounting, complies with the requirements of MLAR (German fire protection directive) November 2005:

Requirements of the directive: The structural integrity and deformation characteristics of support systems for pipeline systems must be proven via fire testing (F30 applications). This applies for necessary stairways and hallways with or without F30 joist constructions.

Rail profile	Length mm	Art. no.	PU m
41/41/1.8	2000	0862 001 007	10
41/41/1.8	3000	0862 001 227	15
41/41/1.8	6000	0862 001 237	24

Drawing available on request

Hot-dip galvanised version

Rail profile	Length mm	Art. no.	PU m
41/41/2.5	3000	0862 001 442	15
41/41/2.5	6000	0862 001 443	24