


BUCKET BLIND RIVET

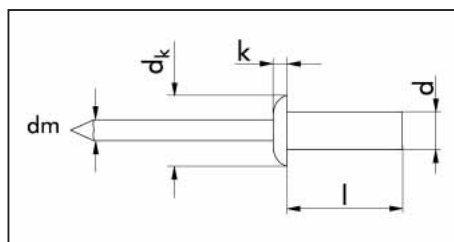

Round pan head

Sleeve: Aluminum

Pin: Bare steel


Round pan head, bucket-shaped rivet shank, air- and spray-water-proof riveting.

Special riveting range

- Captive rivet pin head
- Very thick rivet sleeve wall thanks to a thinner pin, which makes for high shear strength.

d x l in mm	Drill hole dia. in mm	Clamping range in mm	d _k in mm	k in mm	dm in mm	Shear fracture load in N	Tensile fracture load in N	Art. No.	P. Qty.
3.2 x 6.5	3.3	0.5-2.0	6.0	1.3	1.7	1,170	1,350	0937 032 65	500
3.2 x 8.0	3.3	1.5-3.5	6.0	1.3	1.7	1,170	1,350	0937 032 80	500
3.2 x 9.5	3.3	3.0-5.0	6.0	1.3	1.7	1,170	1,350	0937 032 95	500
3.2 x 12.5	3.3	6.0-8.0	6.0	1.3	1.7	1,170	1,350	0937 032 125	500
4.0 x 8.0	4.1	0.5-3.5	8.0	1.7	2.2	1,660	2,250	0937 04 8	500
4.0 x 9.5	4.1	3.0-5.0	8.0	1.7	2.2	1,660	2,250	0937 04 10	500
4.0 x 12.5	4.1	6.0-8.0	8.0	1.7	2.2	1,660	2,250	0937 04 125	500
4.8 x 8.5	4.9	0.5-3.5	9.5	2.0	2.7	2,330	3,170	0937 048 8	500
4.8 x 9.5	4.9	3.0-5.0	9.5	2.0	2.7	2,330	3,170	0937 048 10	500
4.8 x 13.0	4.9	6.0-8.0	9.5	2.0	2.7	2,330	3,170	0937 048 12	500
4.8 x 14.5	4.9	7.5-9.5	9.5	2.0	2.7	2,330	3,170	0937 048 15	500
4.8 x 18.0	4.9	10.5-13.0	9.5	2.0	2.7	2,330	3,170	0937 048 18	500
4.8 x 21.0	4.9	12.5-16.0	9.5	2.0	2.7	2,330	3,170	0937 048 21	250

Storable in ®ORSY

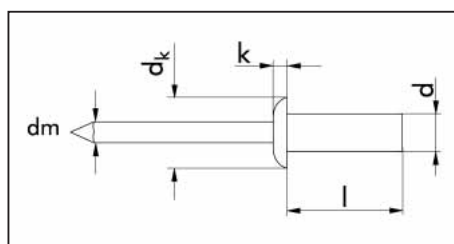

Round pan head

Sleeve: Aluminum

Pin: Stainless steel A2

d x l in mm	Drill hole dia. in mm	Clamping range in mm	d _k in mm	k in mm	dm in mm	Shear fracture load in N	Tensile fracture load in N	Art. No.	P. Qty.
3.2 x 6.5	3.3	0.5-2.0	6.0	1.3	1.7	1,170	1,350	0937 132 65	500
3.2 x 8.0	3.3	1.5-3.5	6.0	1.3	1.7	1,170	1,350	0937 132 80	500
3.2 x 9.5	3.3	3.0-5.0	6.0	1.3	1.7	1,170	1,350	0937 132 95	500
3.2 x 12.5	3.3	6.0-8.0	6.0	1.3	1.7	1,170	1,350	0937 132 125	500
4.0 x 8.0	4.1	0.5-3.5	8.0	1.7	2.2	1,660	2,250	0937 140 80	500
4.0 x 9.5	4.1	3.0-5.0	8.0	1.7	2.2	1,660	2,250	0937 140 95	500
4.0 x 12.5	4.1	6.0-8.0	8.0	1.7	2.2	1,660	2,250	0937 140 125	500
4.8 x 8.0	4.9	1.0-3.5	9.5	2.0	2.7	2,330	3,170	0937 148 80	500
4.8 x 9.5	4.9	3.0-5.0	9.5	2.0	2.7	2,330	3,170	0937 148 95	500
4.8 x 12.5	4.9	6.0-8.0	9.5	2.0	2.7	2,330	3,170	0937 148 125	500
4.8 x 16.0	4.9	9.0-11.0	9.5	2.0	2.7	2,330	3,170	0937 148 160	500
4.8 x 18.0	4.9	10.5-13.0	9.5	2.0	2.7	2,330	3,170	0937 148 180	500
4.8 x 21.0	4.9	12.5-16.0	9.5	2.0	2.7	2,330	3,170	0937 148 210	250

Storable in ®ORSY