


# FILLISTER-HEAD SCREWS

**DIN 6912**  
with low Allen head  
and key guide

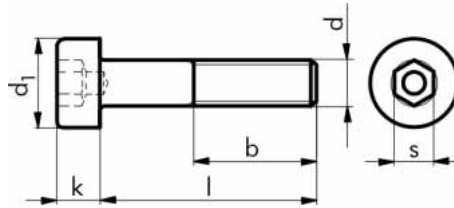

Bare 08.8 steel  
Galvanized 08.8 steel, blue passivated  
A2 A4

Nominal diameter d	M4	M5	M6	M8	M10	M12	M14	M16	M20	M24	M30
d <sub>1</sub> in mm	7	8.5	10	13	16	18	21	24	30	36	45
b in mm	14	16	18	22	26	30	34	38	46	54	66
s in mm	3	4	5	6	8	10	12	14	17	19	22
k in mm	2.8	3.5	4	5	6.5	7.5	8.5	10	12	14	17.5

Attention: Screws may only be subjected to limited loading, cf. DIN EN ISO 898-1:2009  
(This switchover concerns only a change in identification and designation of the strength class)

Nominal diameter d	Length l in mm	Bare 08.8 steel Art. No.	P. Qty.	08.8 steel, galv., blue passivated Art. No.	P. Qty.	A2 Art. No.	P. Qty.	A4 Art. No.	P. Qty.
M4	6	0088 4 6	500	0086 4 6	500	0098 4 6	500	0099 4 6	500
M4	8	0088 4 8	500	0086 4 8	500	0098 4 8	100	0099 4 8	1,000
M4	10	0088 4 10	500	0086 4 10	500	0098 4 10	100	0099 4 10	1,000
M4	12	0088 4 12	500	0086 4 12	500	0098 4 12	100	0099 4 12	500
M4	14			0086 4 14	500	0098 4 14	500		
M4	16	0088 4 16	500	0086 4 16	500	0098 4 16	100	0099 4 16	1,000
M4	18	0088 4 18	500	0086 4 18	500	0098 4 18	1,000		
M4	20	0088 4 20	500	0086 4 20	500	0098 4 20	100	0099 4 20	1,000
M4	22			0086 4 22	500				
M4	25	0088 4 25	500	0086 4 25	500	0098 4 25	500	0099 4 25	500
M4	30	0088 4 30	500	0086 4 30	500	0098 4 30	500	0099 4 30	500
M4	35	0088 4 35	500	0086 4 35	500	0098 4 35	200		
M4	40	0088 4 40	200	0086 4 40	200	0098 4 40	200		
M4	45	0088 4 45	200	0086 4 45	500	0098 4 45	500		
M4	50			0086 4 50	500	0098 4 50	500		
M4	55			0086 4 55	100				
M4	70			0086 4 70	200				
M4	110			0086 4 110	100	0098 4 110	100		
M4	130					0098 4 130	5		
M5	6	0088 5 6	1,000	0086 5 6	500	0098 5 6	500		
M5	8	0088 5 8	500	0086 5 8	500	0098 5 8	100	0099 5 8	500
M5	10	0088 5 10	500	0086 5 10	500	0098 5 10	100	0099 5 10	500
M5	12	0088 5 12	500	0086 5 12	500	0098 5 12	100	0099 5 12	500
M5	14			0086 5 14	500	0098 5 14	500		
M5	16	0088 5 16	500	0086 5 16	500	0098 5 16	100	0099 5 16	500
M5	18	0088 5 18	500	0086 5 18	500				
M5	20	0088 5 20	500	0086 5 20	500	0098 5 20	100	0099 5 20	500
M5	25	0088 5 25	500	0086 5 25	500	0098 5 25	100	0099 5 25	200
M5	30	0088 5 30	500	0086 5 30	500	0098 5 30	100	0099 5 30	200
M5	35	0088 5 35	200	0086 5 35	200	0098 5 35	200	0099 5 35	200
M5	38			0086 5 38	500				
M5	40	0088 5 40	200	0086 5 40	200	0098 5 40	200	0099 5 40	200
M5	45	0088 5 45	200	0086 5 45	200	0098 5 45	200	0099 5 45	200
M5	50	0088 5 50	200	0086 5 50	200	0098 5 50	200	0099 5 50	200
M5	55	0088 5 55	200	0086 5 55	200				
M5	60	0088 5 60	200	0086 5 60	200	0098 5 60	200		
M5	65			0086 5 65	200				
M5	70	0088 5 70	200	0086 5 70	200	0098 5 70	200		
M5	75					0098 5 75	200		
M5	80	0088 5 80	200	0086 5 80	200	0098 5 80	100		
M5	100			0088 6 100	50				
M6	8	0088 6 8	500	0086 6 8	500		500	0099 6 8	500
M6	10	0088 6 10	200	0086 6 10	500	0098 6 10	100	0099 6 10	500
M6	12	0088 6 12	200	0086 6 12	500	00986 12	100	0099 6 12	500
M6	14	0088 6 14	500	0086 6 14	500	0098 6 14	200		
M6	16	0088 6 16	200	0086 6 16	500	0098 6 16	100	0099 6 16	200
M6	18	0088 6 18	500	0086 6 18	500	0098 6 18	200		
M6	20	0088 6 20	200	0086 6 20	500	0098 6 20	100	0099 6 20	200
M6	22	0088 6 22	500	0086 6 22	500				
M6	25	0088 6 25	200	0086 6 25	500	0098 6 25	100	0099 6 25	200
M6	30	0088 6 30	200	0086 6 30	500	0098 6 30	100	0099 6 30	200
M6	35	0088 6 35	200	0086 6 35	200	0098 6 35	100	0099 6 35	200
M6	40	0088 6 40	200	0086 6 40	200	0098 6 40	100	0099 6 40	200

Specified dimensions not binding. Subject to technical changes!