


CONDUIT WBY-EL-F



Classification: 2232

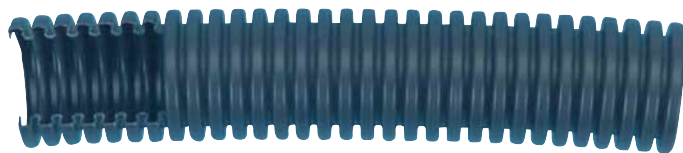

VDE 0605 and
DIN EN 61386-22

Light compressive strength
320 N/5 cm

Flame-resistant and not halogen-free


Additional articles:

Hook nail

Art. No. 0478 45 3.., 0478 46 3..

Outside diameter	Color	Art. No.	P.Qty. in m
16 mm	Black	0975 251 016	100
20 mm		0975 251 020	
25 mm		0975 251 025	
32 mm		0975 251 032	50
40 mm		0975 251 040	
50 mm		0975 251 050	25
63 mm		0975 251 063	

CONDUIT WFKUS-EM-F

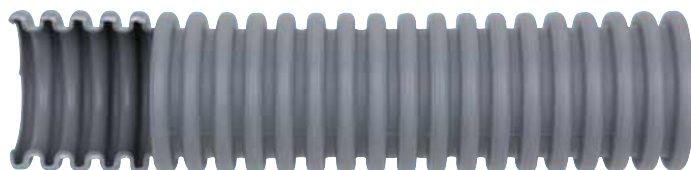

Classification: 3432



VDE 0605 and
DIN EN 61386-22

Medium compressive strength
750 N/5 cm

Flame-resistant and not halogen-free

Outside diameter	Color	Art. No.	P.Qty. in m
16 mm	Gray	0975 253 016	100
20 mm		0975 253 020	
25 mm		0975 253 025	
32 mm		0975 253 032	50
40 mm		0975 253 040	
50 mm		0975 253 050	25
63 mm		0975 253 063	

PLUG-IN SLEEVE



For conduits WBY-EL-F and
WFKUS-EM-F

Outside diameter	Art. No.	P.Qty. in m
16 mm	0975 255 016	100
20 mm	0975 255 020	
25 mm	0975 255 025	
32 mm	0975 255 032	50
40 mm	0975 255 040	25
50 mm	0975 255 050	10
63 mm	0975 262 163	5