


# Side Marker Lamps Version for Light Bulbs

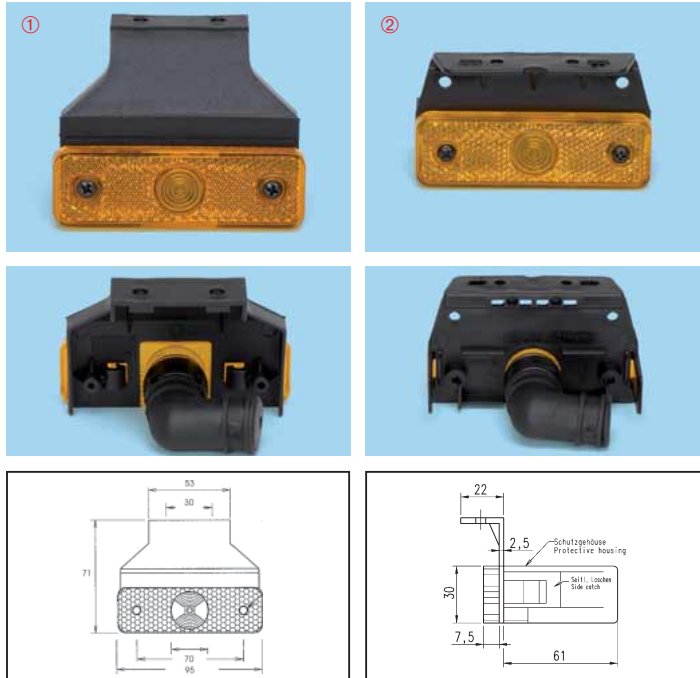

## Side Marker Lamp for Light Bulbs


**universal  
ADR-tested**

- Watertight thanks to patented dual chamber system.
- Version with protective hood: IP 68.
- Incl. light bulbs, 24 V / 4 W (T8/4).
- Angle bracket with 30 mm mounting hole spacing.
- **Connection:** ① Bayonet lock on back  
② Bayonet lock on back with protective hood.

### Accessories

Designation	Art. No.	P. Qty.
Socket housing with light bulb 24 V / 4 W (T8/4)	<b>0812 42 843</b>	2
T8 / 4 W Light bulb, 24 V (HD)	<b>0720 150 21</b>	10
T8 / 4 W Light bulb, 12 V	<b>0770 150 1</b>	

Can be used for vehicle electrical systems with voltage:	Angle bracket	Connection	Comparison number	Art.-No.	P. Qty.
12 V/24 V	● ①	① Bayonet lock	–	<b>0812 42 841</b>	10
12 V/24 V	● ②	② Bayonet lock with protective hood	–	<b>0812 42 848</b>	

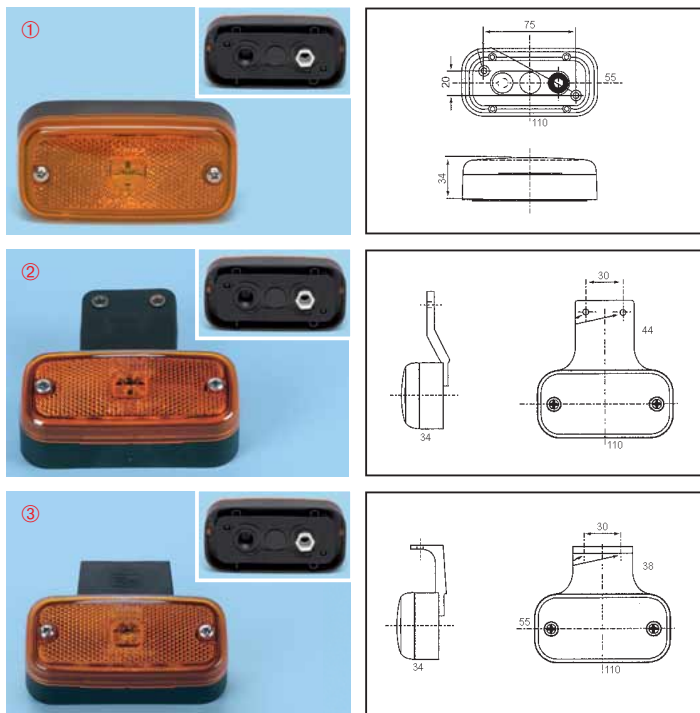

## Side Marker Lamp for Light Bulbs

**universal  
ADR-tested**

- Not equipped with light bulbs.
- **Connection:** Screw connection on back.

### Accessories

Designation	Art. No.	P. Qty.
Replacement lens (with seal and screws)	<b>0812 42 87</b>	1
T8/4 W Light bulb, 24 V (HD)	<b>0720 150 21</b>	10
T8/4 W Light bulb, 12 V	<b>0720 150 1</b>	
FLRYY Replacement cable, 2 x 0.75 mm <sup>2</sup>	<b>0770 121</b>	50
Non insulated push-on receptacle, 6.3 mm	<b>0558 991 9</b>	100
Securing screws, self-locking, 4.8 x 13 mm	<b>0211 48 13</b>	1000

Can be used for vehicle electrical systems with voltage:	Angle bracket	Connection	Comparison number	Art.-No.	P. Qty.
12 V/24 V	– ①	Screw connection	–	<b>0812 42 84</b>	8
12 V/24 V	● ②	Screw connection	–	<b>0812 42 85</b>	6
12 V/24 V	● ③	Screw connection	–	<b>0812 42 86</b>	