
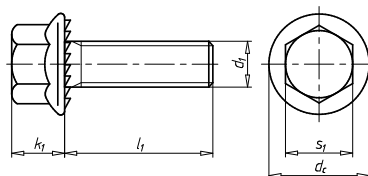


HEXAGON HEAD SERRATED SCREW WITH FLANGE

W-0274 steel 8.8, galvanised, blue passivated (A2K)

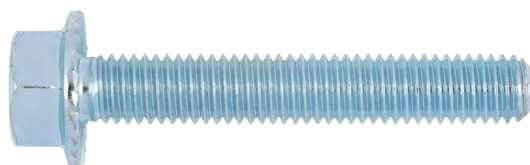

Thread type x nominal diameter (d ₁)	Length (l ₁)	Head diameter (d _c)	Head height (k ₁)	External drive (s ₁)	Pitch	Art.-Nr.	P. Qty.
M10	16 mm	21,8 mm	9,2 mm	SW15	1,5 mm	0274 010 16	100
M10	20 mm	21,8 mm	9,2 mm	SW15	1,5 mm	0274 010 20	100
M10	25 mm	21,8 mm	9,2 mm	SW15	1,5 mm	0274 010 25	100
M10	30 mm	21,8 mm	9,2 mm	SW15	1,5 mm	0274 010 30	100
M10	35 mm	21,8 mm	9,2 mm	SW15	1,5 mm	0274 010 35	100
M10	40 mm	21,8 mm	9,2 mm	SW15	1,5 mm	0274 010 40	100
M10	50 mm	21,8 mm	9,2 mm	SW15	1,5 mm	0274 010 50	100
M12	20 mm	26 mm	10,6 mm	SW17	1,75 mm	0274 012 20	100
M12	25 mm	26 mm	10,6 mm	SW17	1,75 mm	0274 012 25	100
M12	30 mm	26 mm	10,6 mm	SW17	1,75 mm	0274 012 30	100
M12	35 mm	26 mm	10,6 mm	SW17	1,75 mm	0274 012 35	100
M12	40 mm	26 mm	10,6 mm	SW17	1,75 mm	0274 012 40	100
M12	45 mm	26 mm	10,6 mm	SW17	1,75 mm	0274 012 45	100
M12	50 mm	26 mm	10,6 mm	SW17	1,75 mm	0274 012 50	100