


SET SCREWS

DIN EN ISO 4026

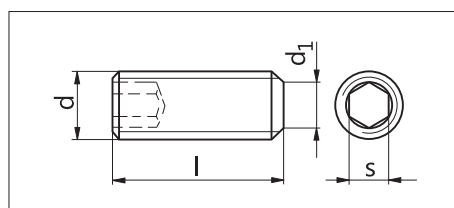

replaces DIN 913

with Allen socket and truncated cone

A2 stainless steel, 21 H

A4 stainless steel, 21 H



Hardness 21H corresponds to a hardness of 210 HV.

d	M2	M2.5	M3	M4	M5	M6	M8	M10	M12	M16
d ₁ in mm	1	1.5	2	2.5	3.5	4	5.5	7	8.5	12
s in mm	0.9	1.3	1.5	2	2.5	3	4	5	6	8

Nominal dia. d	Length l in mm	A2 stainless steel Art. No.	P. Qty.	A4 stainless steel Art. No.	P. Qty.
M2	2	0261 2 2	1,000		
	3	0261 2 3		0221 2 3	1,000
	4	0261 2 4		0221 2 4	
	12	0261 2 12			
M2.5	3	0261 25 3	1,000		
	4	0261 25 4			
	5	0261 25 5			
M3	3	0261 3 3	200	0221 3 3	200
	4	0261 3 4		0221 3 4	
	5	0261 3 5		0221 3 5	
	6	0261 3 6		0221 3 6	
	8	0261 3 8		0221 3 8	
	10	0261 3 10		0221 3 10	
	12	0261 3 12		0221 3 12	
	14	0261 3 14			
	16	0261 3 16		0221 3 16	
	20	0261 3 20		0221 3 20	
	25	0261 3 25		0221 3 25	
	30	0261 3 30			
M4	3	0261 4 3	200	0221 4 3	200
	4	0261 4 4		0221 4 4	
	5	0261 4 5		0221 4 5	
	6	0261 4 6		0221 4 6	
	8	0261 4 8		0221 4 8	
	10	0261 4 10		0221 4 10	
	12	0261 4 12		0221 4 12	
	14	0261 4 14			
	16	0261 4 16		0221 4 16	
	20	0261 4 20		0221 4 20	
	25	0261 4 25		0221 4 25	
	30	0261 4 30		0221 4 30	
	35	0261 4 35	100	0221 4 35	500
	40	0261 4 40		0221 4 40	
M5	4	0261 5 4	200	0221 5 4	200
	5	0261 5 5		0221 5 5	
	6	0261 5 6		0221 5 6	
	8	0261 5 8		0221 5 8	
	10	0261 5 10		0221 5 10	
	12	0261 5 12		0221 5 12	

Can be stored in ORSY®

DIN 913 has been retracted and replaced by international standard DIN EN ISO 4026.