



HEAT-SHRINK CRIMP Y-BRANCH CONNECTOR BUTT CONNECTOR

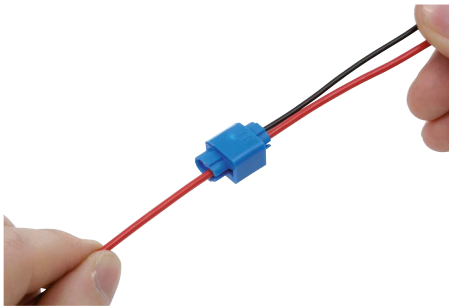

Usual method:
Not dust-proof and moisture-proof.
For use in dry areas only!

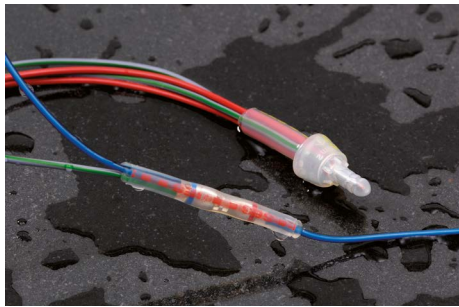

Heat-shrink crimp Y-branch connector:
Dust-proof and moisture-proof.
For universal use.

Branch connections from one to two wires with same wire cross section.

Transparent heat-shrink tubing
Straightforward visual monitoring of connection

Slimline design
Low space requirement

Shrinkage ratio of 4:1
Broad range of applications

Art. No.	0555 616 0	0555 616 1	0555 616 2	0555 616 4
P. Qty.	25 / 100	25 / 100	25 / 50	25
Min./max. wire cross section	0.35-0.5 mm ²	0.75-1 mm ²	1.5-2.5 mm ²	
Wire cross section				4 mm ²
Colour	White, Red	Red, Blue	Blue, Yellow	Yellow, Red
Dielectric strength	20 kV/mm	20 kV/mm	20 kV/mm	20 kV/mm
IP protection class	IP 67	IP 67	IP 67	IP 67
Min./max. temperature conditions	-55 to 110 °C	-55 to 110 °C	-55 to 110 °C	-55 to 110 °C
Min. shrinkage temperature	300 °C	300 °C	300 °C	300 °C
Length	44 mm	48 mm	55 mm	60 mm

Can be stored in ORSY

Application area

Dust-proof and damp-proof connections

Proof of Performance

RoHS-compliant

Notice

Avoid localised overheating of the heat-shrink tubing.