


FBS 2 WINDOW CONSTRUCTION SCREWS

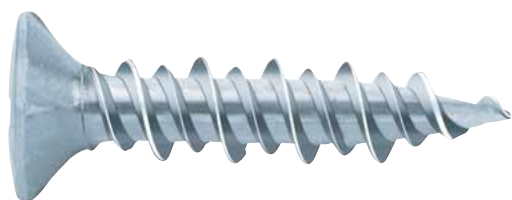



Steel, galv., blue passivated (A3K)

- Drive: PH 2
- Double-threaded Hilo thread with needle tip.
- Head dia.: 7.0 mm

Drive	Nominal dia. in mm	Length l in mm	Art. No. Steel, galv., blue passivated	P. Qty.
PH2	4.0	19	0185 684 019	1000
		22	0185 684 022	
		25	0185 684 025	
		30	0185 684 030	
		35	0185 684 035	
		38	0185 684 038	500
		45	0185 684 045	

Can be stored in ORSY® System.

FBS REPAIR SCREW

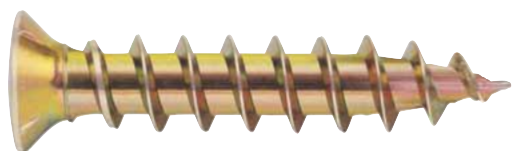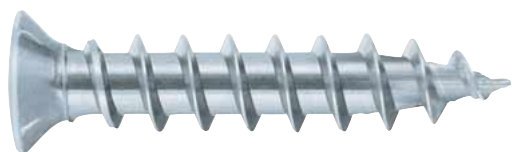

Steel, galv., blue passivated (A3K)

- Special thread with needle tip.
- Head dia.: 7.0 mm
- 4.8 mm dia. makes it suitable for repair work in case of torn-out screws (3.9 – 4.2 mm dia.).

Drive	Nominal dia. in mm	Length l in mm	Art. No. Steel, galv., blue passivated	Art. No. Steel, yellow galvanized	P. Qty.
PH2	4.8	25	0185 284 825	0185 264 825	500
	4.8	38	0185 284 838	0185 264 838	
AW20	4.8	25	0188 144 825	–	1000
	4.8	38	0188 144 838	–	

Can be stored in ORSY® System.

Please also observe the information on the overview page.