


SET SCREWS

DIN EN ISO 4028

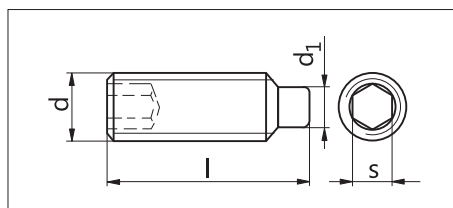

replaces DIN 915

with Allen socket and stud

A2 stainless steel, 21 H
A4 stainless steel, 21 H



Hardness 21H corresponds to a hardness of 210 HV.

d	M3	M4	M5	M6	M8	M10	M12
d ₁ in mm	2	2.5	3.5	4	5.5	7	8.5
s in mm	1.5	2	2.5	3	4	5	6

Nominal dia. d	Length l in mm	A2 stainless steel Art. No.	P. Qty.	A4 stainless steel Art. No.	P. Qty.
M3	3	0222 3 3	200		
	4	0222 3 4			
	5	0222 3 5			
	6	0222 3 6			
	8	0222 3 8			
	10	0222 3 10			
	12	0222 3 12			
	16	0222 3 16			
M4	20	0222 3 20			
	4	0222 4 4	200	0266 4 4	200
	5	0222 4 5			
	6	0222 4 6		0266 4 6	
	8	0222 4 8		0266 4 8	
	10	0222 4 10		0266 4 10	
	12	0222 4 12		0266 4 12	
	16	0222 4 16		0266 4 16	
	20	0222 4 20		0266 4 20	
	25			0266 4 25	
	30	0222 4 30			
M5	5	0222 5 5	200		200
	6	0222 5 6		0266 5 6	
	8	0222 5 8		0266 5 8	
	10	0222 5 10		0266 5 10	
	12	0222 5 12		0266 5 12	
	16	0222 5 16		0266 5 16	
	20	0222 5 20		0266 5 20	
	25	0222 5 25			
M6	6	0222 6 6	100	0266 6 6	200
	8	0222 6 8		0266 6 8	100
	10	0222 6 10		0266 6 10	
	12	0222 6 12		0266 6 12	
	14	0222 6 14			
	16	0222 6 16		0266 6 16	
	20	0222 6 20		0266 6 20	200
	25	0222 6 25		0266 6 25	
	30	0222 6 30		0266 6 30	
	35	0222 6 35		0266 6 35	
	40	0222 6 40			
	50	0222 6 50			

Can be stored in ORSY®

DIN 915 has been retracted and replaced by international standard DIN EN ISO 4028.