



HEAT-SHRINK CRIMP BRANCH CONNECTOR END CONNECTOR

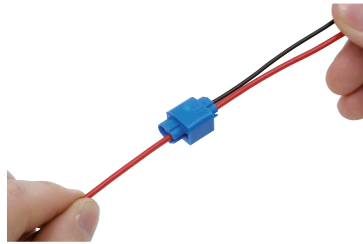

Usual method:
Not dust-proof and moisture-proof.
For use in dry areas only!



Heat-shrink crimp Y-branch
connector:
Dust-proof and moisture-proof.
For universal use.

Art. No.	0555 618 1	0555 618 2
P. Qty.	25 / 50	25 / 50
Max. bundle diameter (Bündel-Ø max.)	2.0 mm	3.7 mm
Internal diameter (shrunk)	2.0 mm	2.7 mm
Colour	Blue	Yellow
Dielectric strength	20 kV/mm	20 kV/mm
IP protection class	IP 67	IP 67
Min./max. temperature conditions	-55 to 110 °C	-55 to 110 °C
Min. shrinkage temperature	300 °C	300 °C
Length	35 mm	50 mm

Can be stored in ORSY

Branch connections from two to max. four wires

Transparent heat-shrink tubing
Straightforward visual monitoring of connection

Slimline design
Low space requirement

Shrinkage ratio of 4:1
Broad range of applications

Application area
Dust-proof and damp-proof connections

Notice
Avoid localised overheating of the heat-shrink tubing!

Proof of Performance
RoHS-compliant

HEAT-SHRINK SOLDER BRANCH CONNECTOR END CONNECTOR



Art. No.	0555 924 10	0555 924 20	0555 924 30	0555 924 40
P. Qty.	25	25	25	25
Max. bundle diameter (Bündel-Ø max.)	3.3 mm	4.5 mm	7.0 mm	9.0 mm
Colour	Green	Red	Blue	Yellow
Dielectric strength	2 kV/mm	2 kV/mm	2 kV/mm	2 kV/mm
IP protection class	IP 67	IP 67	IP 67	IP 67
Min./max. temperature conditions	-40 to 125 °C	-40 to 125 °C	-40 to 125 °C	-40 to 125 °C
Min. shrinkage temperature	500 °C	500 °C	500 °C	500 °C

Can be stored in ORSY

Transparent heat-shrink tubing
Straightforward visual monitoring of the connection

Application area
Dust-proof and damp-proof connections

Notice
Avoid localised overheating of the heat-shrink tubing.