


Nails for flat webbed building wire

Hardened steel, blue tempered, dia. 2 mm

- With plastic safety head to prevent short circuits on mounting flat webbed building wire.

Dia. in mm	Length in mm	Art. No.	P. Qty.
2.0	12.0	0478 42 12	1000
	16.0	0478 42 16	
	18.0	0478 42 18	
	23.0	0478 42 23	
	30.0	0478 42 30	
	40.0	0478 42 40	
	50.0	0478 42 50	
	60.0	0478 42 60	

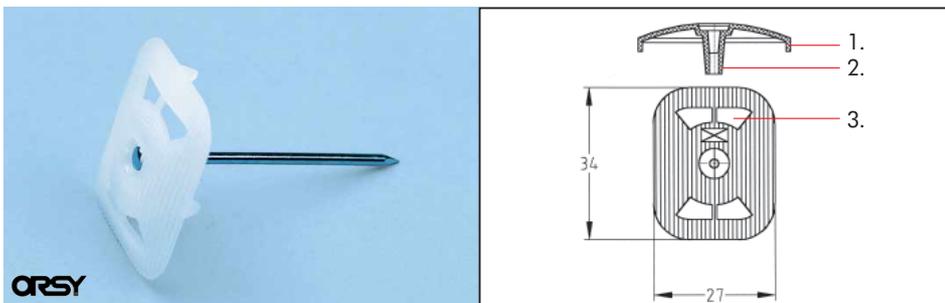

Nail washers

- **Simple handling**
→ Saves time and money.
- **Rectangular design**
34 x 27 mm
→ Simplifies storage, reduces costs.

Washer dim. in mm	Nail dimensions in mm	Art. No.	P. Qty.
34 x 27	Without nail *	0478 25 001	300
	2.0 x 40	0478 25 002	200
	2.0 x 50	0478 25 003	150
	2.0 x 60	0478 25 004	
	2.5 x 70	0478 25 005	100
	3.3 x 40	0478 25 010	150
	3.3 x 50	0478 25 006	100
	3.3 x 60	0478 25 007	
	3.3 x 70	0478 25 009	
	3.3 x 85	0478 25 008	

- For easy cable and pipe mounting in cable slits, mounting paths and on walls and ceilings.
 - Extremely flat design makes plastering over easy.
 - Can be used in mortar joints, hollow bricks, lightweight concrete, gypsum and gas concrete.
 - Nail: steel, hardened and galvanized.
Washer: polyethylene, **halogen- and silicone-free.**
- Temperature resistance:
-30°C to +80°C.



* For individual finishing with steel nails of a diameter from 3.0 to 3.5 mm, Art. No. 0478 035 ... / 0478 235 ...

- 1) Keeper lugs prevent the lines from slipping out.
- 2) Extended nail insulation prevents damage to the cable.
- 3) Plaster openings and roughened surface ensure perfect plaster grip.



Nail washer boxes

- Loosely packed bulk contents.

Washer dim. in mm	Nail dim. in mm	Contents (pcs.)	Art. No.	P. Qty.
34 x 27	2.0 x 40	2,250	0478 25 102	1
	3.3 x 50	1,750	0478 25 106	