




orsy

Full-Metal Safety Nuts

similar to DIN 980

A2, A4

- When the screw connection between the bolt and nut is made, the screw thread is tensed by the narrowing of the thread pitch and the thread diameter of the nut.
- Application in temperature range of nut: -70°C to +300°C.

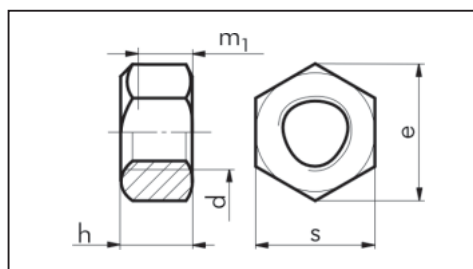

Full-Metal Safety Nuts

DIN 980

Property class 8

Galvanized steel, blue passivated (A2K)

Galvanized steel, yellow passivated (A2C)

Property class 10


Zinc-nickel, transparent passivated (P3E)

Chrom(VI)-frei: Fulfills the EU End-of-Life Vehicles Directive.

Thread	e in mm	h in mm	m ₁ in mm	s in mm	Steel 8 galv., blue pass. Art. No.	P. Qty.	Steel 10 galv., yellow pass. Art. No.	P. Qty.	Steel 10 Zinc-Nickel Art. No.	P. Qty.	h as per DIN 934 in mm	A2, similar to DIN 980 Art. No.	P. Qty.	A4, similar to DIN 980 Art. No.	P. Qty.
M 4	7.66	4.2	2.2	7	0369 4	100	—	—	—	—	3.2	0380 4	200/50	0397 024	100
M 5	8.79	5.1	2.75	8	0369 5	100	0369 005	100	—	—	4	0380 5	50	0397 025	200
M 6	11.05	6	3.3	10	0369 6	100	0369 006	100	—	—	5	0380 6	50	0397 026	200
M 8	14.38	8	4.4	13	0369 8	100	0369 008	100	0263 008 10	50	6.5	0380 8	50	0397 028	50
M 10	18.9	10	5.5	17	0369 10	100/500	0369 010	100	—	—	8	0380 10	50	0397 021 0	50
M 10x1	18.9	10	5.5	17	0369 10 1	100	0369 010 1	50	0263 001 010	50	8	—	—	—	—
M 10x1.25	18.9	10	5.5	17	0369 10 125	100	0369 010 125	50	—	—	8	—	—	—	—
M 12	21.1	12	6.6	19	0369 12	100	0369 012	50	—	—	10	0380 12	50	0397 021 2	100
M 12x1.5	21.1	12	6.6	19	0369 12 15	100	0369 012 15	50	0263 001 215	50	10	—	—	—	—
M 14	24.49	14	7.7	22	0369 14	50	0369 014	25	—	—	11	—	—	—	—
M 14x1.5	24.49	14	7.7	22	0369 14 15	50	0369 014 15	25	0263 001 415	25	11	—	—	—	—
M 16	26.75	16	8.8	24	0369 16	50	0369 016	25	—	—	13	0380 16	25	0397 021 6	50
M 16x1.5	26.75	16	8.8	24	0369 16 15	50	0369 016 15	25	0263 001 615	25	13	—	—	—	—
M 18	29.56	18	9.9	27	0369 18	25	—	—	—	—	15	—	—	—	—
M 18x1.5	29.56	18	9.9	27	0369 18 15	25	0369 018 15	25	—	—	15	—	—	—	—
M 20	32.96	20	11	30	0369 20	25	0369 020	25	—	—	16	0380 20	100	0397 022 0	50
M 20x1.5	32.96	20	11	30	0369 20 15	25	0369 020 15	25	0263 002 015	25	16	—	—	—	—
M 24	39.55	24	13.2	36	0369 24	5	—	—	—	—	19	—	—	—	—
M 24x1.5	—	—	—	—	—	—	—	—	0263 002 415	25	19	—	—	—	—



orsy

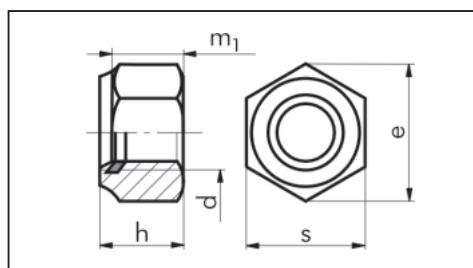

Stop Nuts

DIN 982

Galv. steel 8, blue passivated

A2
A4

Thread d	e in mm	h in mm	m ₁ in mm	s in mm	Galvanized steel 8, blue passivated Art. No.	P. Qty.	A2	P. Qty.	A4	P. Qty.
M 5	8.79	6.3	3.52	8	—	—	0391 015	200	0397 015	200
M 6	11.05	8	3.92	10	0371 6	100	0391 016	200	0397 016	200
M 8	14.38	9.5	5.15	13	0371 8	100	0391 018	200	0397 018	200
M 10	18.90	11.5	6.43	17	0371 10	100	0391 011 0	100	0397 011 0	100
M 10 x 1.25	18.90	11.5	6.43	17	0371 10 125	50	—	—	—	—
M 12	21.10	14	8.3	19	0371 12	100	0391 011 2	50	0397 011 2	50
M 12 x 1.25	21.10	14	8.3	19	0371 12 125	100	—	—	—	—
M 12 x 1.5	21.10	14	8.3	19	0371 12 14	100	—	—	—	—
M 16	26.75	18	11.28	24	—	—	0391 011 6	50	0397 011 6	50
M 20	32.95	22	13.52	30	—	—	0391 012 0	25	0397 012 0	25