


FEBOS® WITH COUNTERSUNK MILLING HEAD

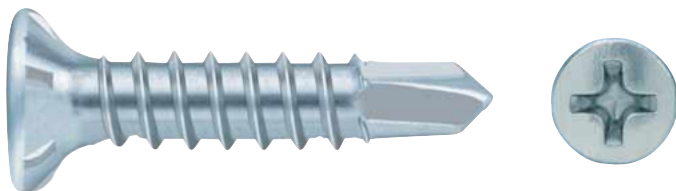

Drive	Nominal dia. in mm	Length l in mm	Art. No.	P. Qty.
PH2	3.9	13	0207 083 913	8,000
		16	0207 083 916	6,000
		19	0207 083 919	5,000
		25	0207 083 925	4,000
		32	0207 083 932	2,500
		38	0207 083 938	2,000

Can be stored in ORSY® System.


Galvanized steel, blue passivated (A2K)

- Tapping screw thread

Self-tapping window construction screw for use in plastic window construction. For the connection of plastic profiles with the metal reinforcement (up to 2.5 mm) and for securing fittings on profiles with metal stiffening (up to 2.5 mm).

Please also observe the information on the overview page.

FEBOS® M WITH COUNTERSUNK MILLING HEAD

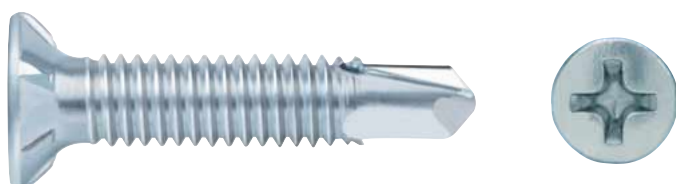

Drive	Nominal dia. in mm	Length l in mm	Art. No.	P. Qty.
PH2	4.0	13	0207 084 013	8,000
		16	0207 084 016	6,000
		20	0207 084 020	5,000
		25	0207 084 025	4,000
		32	0207 084 032	2,500

Can be stored in ORSY® System.

Steel, galv., blue passivated (A2K)

- Metric thread

Self-tapping window construction screw for use in plastic window construction. For the connection of plastic profiles with the metal reinforcement (up to 2.5 mm) and for securing fittings on profiles with metal stiffening (up to 2.5 mm).

- More load-bearing thread turns for thin iron reinforcements.
- The danger of forced feed with large distances between plastic and metal stiffening is minimized by the flat metric thread.

(If a forced feed results, the drilling tip can tear out or the screw can break during processing.)

Please also observe the information on the overview page.