


SET SCREWS

DIN EN ISO 4027

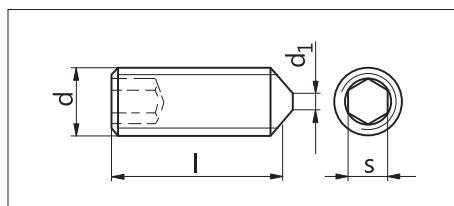

replaces DIN 914

with Allen socket and flattened tip

A2 stainless steel, 21 H
A4 stainless steel, 21 H



Hardness 21H corresponds to a hardness of 210 HV.

d	M2	M2.5	M3	M4	M5	M6	M8	M10	M12	M16
d ₁ in mm	0.5	0.65	0.75	1	1.25	1.5	2	2.5	3	4
s in mm	0.9	1.3	1.5	2	2.5	3	4	5	6	8

Nominal dia. d	Length l in mm	A2 stainless steel Art. No.	P. Qty.	A4 stainless steel Art. No.	P. Qty.
M2	3*	0262 2 3	1,000		
	4	0262 2 4			
	5	0262 2 5			
	6	0262 2 6			
	8	0262 2 8			
	10	0262 2 10			
M2.5	3*	0252 25 3	1,000		
	4	0262 25 4			
	5	0262 25 5			
	6	0262 25 6			
	8	0262 25 8			
M3	3*	0262 3 3	200	0269 3 3	200
	4*	0262 3 4		0269 3 4	
	5	0262 3 5		0269 3 5	
	6	0262 3 6		0269 3 6	
	8	0262 3 8		0269 3 8	
	10	0262 3 10		0269 3 10	
	12	0262 3 12		0269 3 12	
	16	0262 3 16			
	20	0262 3 20		0269 3 20	
	25	0262 3 25			
M4	3*	0262 4 3	100	0269 4 4	500
	4*	0262 4 4		0269 4 5	
	5*	0262 4 5		0269 4 6	
	6	0262 4 6		0269 4 8	
	8	0262 4 8		0269 4 10	
	10	0262 4 10		0269 4 12	
	12	0262 4 12			
	14			0269 4 16	
	16	0262 4 16			
	20	0262 4 20		0269 4 20	
	25	0262 4 25		0269 4 25	
	30			0269 4 30	
	35	0262 4 35			
	40	0262 4 40			

The standard version of the tip is 90°, but very short lengths (those marked with an *) have an angle of 120°.

*Angle of the flattened tip is 120°.

Can be stored in ORSY®

DIN 914 has been retracted and replaced by international standard DIN EN ISO 4027.