



RIVET NUTS

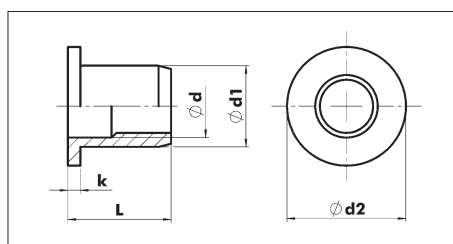

with knurled shank and
round pan head

Stainless steel A2 

Thread dia. d (+0.5/-0)	Drilled hole dia. d	Clamping area s in mm	d ₂ in mm (+0.5/-0.5)	l in mm	d ₁ in mm (+0/-0.2)	k in mm	Max. tensile force of thread in N	Max. shearing force in N	Max. tightening torque in Nm	Art. No.	P. Qty.
M4	6.0	0.5- 3.0	9.0	11.0	5.9	1.1	7,800	2,600	7.0	0942 100 4	100
M4	6.0	3.0- 4.5	9.0	14.0	5.9	1.1	7,800	2,600	7.0	0942 200 4	100
M5	7.0	0.5- 3.0	10.0	13.0	6.9	1.1	11,760	3,920	12.0	0942 100 5	100
M5	7.0	3.0- 5.5	10.0	16.0	6.9	1.1	11,760	3,920	12.0	0942 200 5	100
M6	9.0	0.5- 3.0	12.0	16.0	8.9	1.6	20,580	5,630	22.2	0942 100 6	100
M6	9.0	3.0- 5.5	12.0	18.5	8.9	1.6	20,580	5,630	22.2	0942 200 6	100
M8	11.0	0.5- 3.0	15.0	17.5	10.9	1.6	26,460	7,800	30.5	0942 100 8	100
M8	11.0	3.0- 5.5	15.0	20.0	10.9	1.6	26,460	7,800	30.5	0942 200 8	100
M10	13.0	0.5- 3.0	16.0	19.0	12.9	2.1	35,280	8,800	39.0	0942 100 10	100

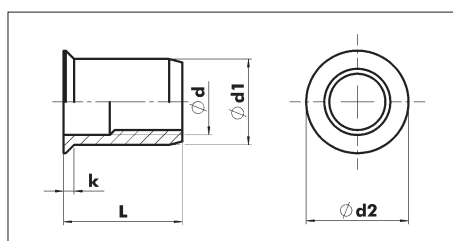

with knurled shank and
countersunk head

Stainless steel A2 

Thread dia. d (+0.5/-0)	Drilled hole dia. d	Clamping area s in mm	d ₂ in mm (+0.5/-0.5)	l in mm	d ₁ in mm (+0/-0.2)	k in mm	Max. tensile force of thread in N	Max. shearing force in N	Max. tightening torque in Nm	Art. No.	P. Qty.
M4	6.0	1.5 - 4.0	8.5	12.5	5.9	1.5	10,130	3,720	9.0	0942 100 04	100
M5	7.0	1.5 - 4.0	9.5	13.5	6.9	1.5	12,250	4,020	10.5	0942 100 05	100
M5	7.0	4.0 - 6.5	9.5	16.0	6.9	1.5	12,250	4,020	10.5	0942 200 05	100
M6	9.0	1.5 - 4.0	11.5	15.5	8.9	1.5	20,580	5,560	21.0	0942 100 06	100
M6	9.0	4.0 - 6.5	11.5	18.0	8.9	1.5	20,580	5,560	21.0	0942 200 06	100
M8	11.0	1.5 - 4.0	13.5	18.5	10.9	1.5	30,840	7,640	31.0	0942 100 08	100
M8	11.0	4.0 - 6.5	13.5	21.0	10.9	1.5	30,840	7,640	31.0	0942 200 08	100
M10	13.0	1.5 - 4.0	15.5	21.0	12.9	1.8	34,300	8,110	33.0	0942 100 010	100
M10	13.0	4.0 - 6.5	15.5	24.0	12.9	1.8	34,300	8,110	33.0	0942 200 010	100