


FEBOS®plus WITH COUNTERSUNK PAN HEAD

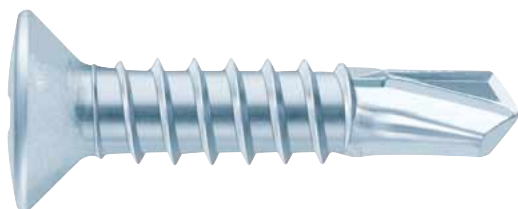

For use in automatic machines, roll-sorted!

Steel, galv., blue passivated (A2K)

- Tapping screw thread
- Head dia.: 7.0 mm

Self-tapping window construction screw for use in plastic window construction. For the connection of plastic profiles with the metal reinforcement (up to 2.5 mm) and for securing fittings on profiles with metal stiffening (up to 2.5 mm).

AW® drive

- Optimum transmission of force
- No ejection forces
- Good centering
- Fast location

Drive	Nominal dia. in mm	Length l in mm	Art. No.	P. Qty.
AW20	3.9	16	0208 143 916	6000
		19	0208 143 919	5000
		25	0208 143 925	4000
		32	0208 143 932	2500
		38	0208 143 938	2000
		45	0208 143 945	1500
		50	0208 143 950	1000
		55	0208 143 955	1000
		60	0208 143 960	1000
PH2	3.9	16	0207 683 916	6000
		19	0207 683 919	5000
		25	0207 683 925	4000
		32	0207 683 932	2500
		38	0207 683 938	2000
		45	0207 683 945	1000
		50	0207 683 950	1000
		55	0207 683 955	1000
		60	0207 683 960	1000

Can be stored in ORSY® System.

Please also observe the information on the overview page.