


CONICAL COUNTERSINK BLUE RING, HSS 90°, DIN 335 C



●●●○

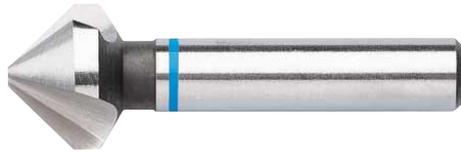

●●●○



●●○○

Designed specifically for processing conventional steels and cast iron

Burr- and chatter-free countersinking and deburring

Precision conical countersink with 3 cutting edges, precision-ground

Optimised flute geometry

Outstanding chip formation and removal

Service life (points system)	2 of 4 points
Countersinking speed (point system)	2 of 4 points
Countersinking quality (point system)	2 of 4 points
Versatility (points system)	1 of 4 points
Countersinking behaviour (point system)	2 of 4 points
Shank style	Round

Color Coding System	Spot-facer diameter	Suitable for screw	Length	Shaft diameter	Art. No.	P. Qty.
Steel	6.3 mm	M3	45 mm	5 mm	0694 017 06	1
Steel	8.3 mm	M4	50 mm	6 mm	0694 017 08	1
Steel	10.4 mm	M5	50 mm	6 mm	0694 017 10	1
Steel	12.4 mm	M6	56 mm	8 mm	0694 017 12	1
Steel	16.5 mm	M8	60 mm	10 mm	0694 017 16	1
Steel	20.5 mm	M10	63 mm	10 mm	0694 017 20	1
Steel	25.0 mm	M12	67 mm	10 mm	0694 017 25	1
Steel	31.0 mm	M16	71 mm	12 mm	0694 017 31	1

Notice

See overview tables for countersink/
material assignments