


## CABLE TIDY HOLDER ALL-ROUNDER



Illustration only

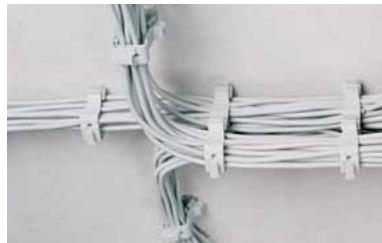

**2–3 multiple cable holders can be mounted below one another (depending on load)**

With only one attachment point

**2 multiple cable holders can be combined back-to-back using a coupling piece**

With only one attachment point



**Can be mounted using an optional quick-action mounting clip**

No additional setting tools required

Art. No.	0971 651 020	0971 651 120	0971 651 040	0971 651 140	0971 651 050	0971 651 150
<b>P. Qty.</b>	125	125	75	75	50	50
<b>Number of cables</b>	20 PCS	20 PCS	40 PCS	40 PCS	50 PCS	50 PCS
<b>Cable type</b>	NYM 3 x 1.5 mm <sup>2</sup>	NYM 3 x 1.5 mm <sup>2</sup>	NYM 3 x 1.5 mm <sup>2</sup>	NYM 3 x 1.5 mm <sup>2</sup>	NYM 3 x 1.5 mm <sup>2</sup>	NYM 3 x 1.5 mm <sup>2</sup>
<b>Diameter of hole</b>	6 mm	6 mm	6 mm	6 mm	6 mm	6 mm
<b>Height</b>	93 mm	93 mm	128 mm	128 mm	138.5 mm	138.5 mm
<b>Min./max. temperature resistance</b>	-30 to 80 °C	-30 to 80 °C	-30 to 80 °C	-30 to 80 °C	-30 to 80 °C	-30 to 80 °C
<b>Flame-retardant</b>	Yes	Yes	Yes	Yes	Yes	Yes
<b>Flame-retardant conditions</b>	at 700°C	by glow-wire test at +960°C, V0	at 700°C	by glow-wire test at +960°C, V0	at 700°C	by glow-wire test at +960°C, V0
<b>Colour</b>	Light grey RAL 7035	Stone grey RAL 7030	Light grey RAL 7035	Stone grey RAL 7030	Light grey RAL 7035	Stone grey RAL 7030
<b>Material</b>	PA - Polyamide	PA 6.0 V-0 - Polyamide	PA - Polyamide	PA 6.0 V-0 - Polyamide	PA - Polyamide	PA 6.0 V-0 - Polyamide
<b>Halogen-free</b>	Yes	Yes	Yes	Yes	Yes	Yes
<b>Silicone-free</b>	Yes	Yes	Yes	Yes	Yes	Yes

### Application area

Cable laying in intermediate partitions  
(walls or ceilings)