
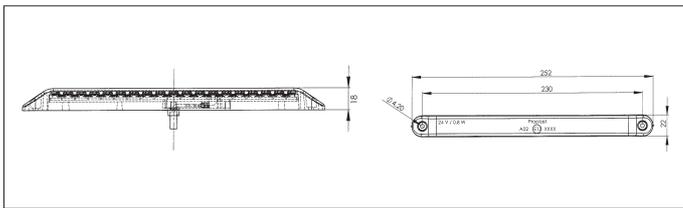


## LED REAR FOG LAMP XL

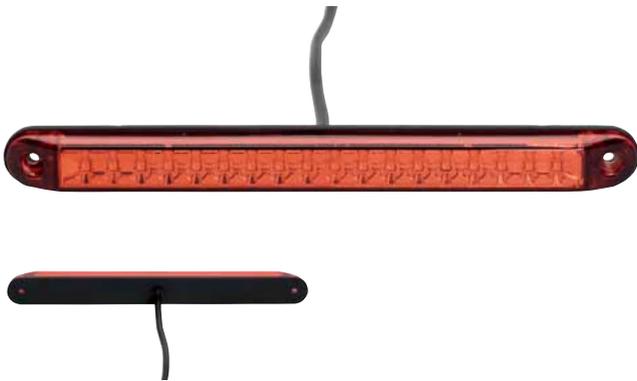


### Universal ADR-tested

- Individual lamps for LED 5-chamber lamp  
Art. No. 0812 46 29\* and 0812 46 27\*
- Protection type: IP67
- Features watertight encapsulation
- Includes flexible backing
- Emitted light: Red
- For horizontal or vertical attachment
- **Connection:** encapsulated cable connection on back

Accessories for HOTMELT connections		
Designation	Art. No.	P. Qty.
Heat-Shrink Butt Connector, 0.5 - 1.5 mm <sup>2</sup>	<b>0555 516 1</b>	25/100/300
Heat-Shrink Tube, thin-walled, 3:1, black	<b>0771 809 53</b>	5
Replacement Cable FLRY, 2 x 0.75 mm <sup>2</sup>	<b>0770 121</b>	50

Can be used in vehicle electrical systems with voltage	Output in W	Angle bracket	Connection	Comparison number	Art. No.	P. Qty.
24 V	3	-	Straight connection with 0.5 m cable	-	<b>0812 46 140</b>	1

## REVERSING LAMP XL

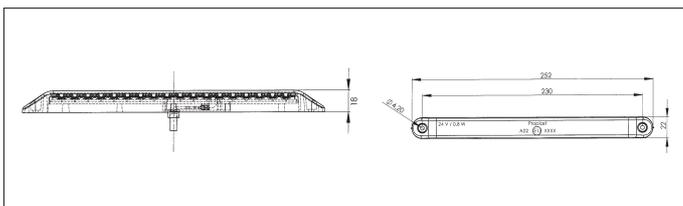

### Universal ADR-tested

- Individual lamp for LED 5-chamber lamp  
Art. No. 0812 46 29\* and 0812 46 27\*
- Protection type: IP67
- Features watertight encapsulation
- Includes flexible backing
- Emitted light: white
- For horizontal or vertical attachment
- **Connection:** encapsulated cable connection on back

Accessories for HOTMELT connections		
Designation	Art. No.	P. Qty.
Heat-Shrink Butt Connector, 0.5 - 1.5 mm <sup>2</sup>	<b>0555 516 1</b>	25/100/300
Heat-Shrink Tube, thin-walled, 3:1, black	<b>0771 809 53</b>	5
Replacement Cable FLRY, 2 x 0.75 mm <sup>2</sup>	<b>0770 121</b>	50

Can be used in vehicle electrical systems with voltage	Output in W	Angle bracket	Connection	Comparison number	Art. No.	P. Qty.
24 V	3	-	Straight connection with 0.5 m cable	-	<b>0812 46 142</b>	1