


LOCK WASHER

DIN 127, steel, mechanically galvanised (MZN)

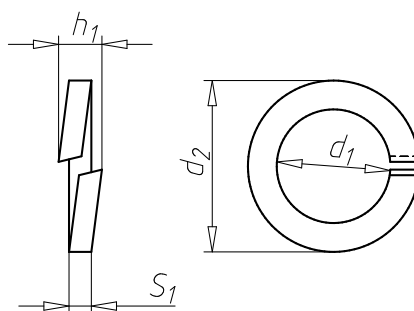

Material	Spring steel
Surface	Mechanically galvanised
RoHS-compliant	Yes
Form	B

Suitable for screw thread	Internal diameter (d_1)	Outer diameter (d_2)	Height (h_1)	Thickness (s_1)	Art. No.	P. Qty.
M2	2.1 mm	4.4 mm	1.2 mm	0.5 mm	0441 2	1000
M2.5	2.6 mm	2.6 mm	1.2 mm	0.6 mm	0441 25	5000
M3	3.1 mm	6.2 mm	1.6 mm	0.8 mm	0441 3	1000/10000
M3.5	3.6 mm	6.7 mm	1.6 mm	0.8 mm	0441 35	500
M4	4.1 mm	7.6 mm	1.8 mm	0.9 mm	0441 4	500/1000/10000
M5	5.1 mm	9.2 mm	2.4 mm	1.2 mm	0441 5	100/500/1000/10000
M6	6.1 mm	11.8 mm	3.2 mm	1.6 mm	0441 6	100/250/500/1000/5000
M7	7.1 mm	12.8 mm	3.2 mm	1.6 mm	0441 7	100/2500
M8	8.1 mm	14.8 mm	4.0 mm	2 mm	0441 8	100/250/500/1000
M10	10.2 mm	18.1 mm	4.4 mm	2.2 mm	0441 10	100/500/1000/2000
M12	12.2 mm	21.1 mm	5.0 mm	2.5 mm	0441 12	100/500/1000
M14	14.2 mm	24.1 mm	6.0 mm	3 mm	0441 14	100/500/1000
M16	16.2 mm	27.4 mm	7.0 mm	3.5 mm	0441 16	100/500
M18	18.2 mm	29.4 mm	7.0 mm	3.5 mm	0441 18	100/250
M20	20.2 mm	33.6 mm	8.0 mm	4 mm	0441 20	50/100/250
M22	22.5 mm	35.9 mm	8.0 mm	4 mm	0441 22	50/100/250
M24	24.5 mm	40 mm	10.0 mm	5 mm	0441 24	25/100
M27	27.5 mm	43 mm	10 mm	5 mm	0441 27	100
M30	30.5 mm	48.2 mm	12.0 mm	6 mm	0441 30	25/100
M33	33.5 mm	55.2 mm	12.0 mm	6 mm	0441 33	25
M36	36.5 mm	58.2 mm	12.0 mm	6 mm	0441 36	25
M39	39.5 mm	61.2 mm	12.0 mm	6 mm	0441 39	50
M42	42.5 mm	68.2 mm	14.0 mm	7 mm	0441 42	50
M48	49.0 mm	75.0 mm	14.0 mm	7.0 mm	0441 48	10
M52	53 mm	83.0 mm	16.0 mm	8 mm	0441 52	1
M64	65 mm	95 mm	16.0 mm	8 mm	0441 64	5

Can be stored in ORSY system

Notice

Only suitable for screws of strength class ≤ 5.8