


## CONNECTING SLEEVE



Illustration only

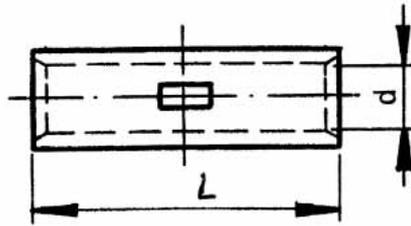

### Standard (similar to DIN)

- With centre stop

### Application area

For multi-wire round conductors, such as compliant with DIN EN 60228 Class 2 for round-pressed sector cables

### Notice

The fitter must check the inserted cable (by trying to pull it out if necessary).

<b>Max. temperature resistance</b>	125 °C
<b>Material</b>	Electrolytic copper
<b>Surface</b>	Tin-plated

Min./max. wire cross section	Wire cross section	Length (l)	Diameter (d)	Art. No.	P. Qty.
1.5-2.5 mm <sup>2</sup>		15 mm	2.5 mm	<b>0967 300 002</b>	100
1.5-2.5 mm <sup>2</sup>		25 mm	2.5 mm	<b>0967 300 003</b>	100
	4 mm <sup>2</sup>	15 mm	3.6 mm	<b>0967 300 004</b>	100
	4 mm <sup>2</sup>	25 mm	3.6 mm	<b>0967 300 005</b>	100
	6 mm <sup>2</sup>	25 mm	3.6 mm	<b>0967 300 006</b>	100
	10 mm <sup>2</sup>	30 mm	4.5 mm	<b>0967 300 010</b>	100
	16 mm <sup>2</sup>	30 mm	5.5 mm	<b>0967 300 016</b>	100
	25 mm <sup>2</sup>	38 mm	7.2 mm	<b>0967 300 025</b>	100
	35 mm <sup>2</sup>	42 mm	8.5 mm	<b>0967 300 035</b>	50
	50 mm <sup>2</sup>	48 mm	10.2 mm	<b>0967 300 050</b>	50
	70 mm <sup>2</sup>	52 mm	12 mm	<b>0967 300 070</b>	25
	95 mm <sup>2</sup>	58 mm	13.5 mm	<b>0967 300 095</b>	25
	120 mm <sup>2</sup>	62 mm	15 mm	<b>0967 300 120</b>	25
	150 mm <sup>2</sup>	68 mm	16.5 mm	<b>0967 300 150</b>	25
	185 mm <sup>2</sup>	72 mm	19 mm	<b>0967 300 185</b>	25
	240 mm <sup>2</sup>	88 mm	21 mm	<b>0967 300 240</b>	25

Can be stored in ORSY system