

# HAMMER-IN FIXING W-ND

93.4

**Galvanized steel**



- Fixing sleeve with washer type rim dia. 5
- Fixing sleeve with washer type rim dia. 6
- Fixing sleeve with countersunk type rim dia. 6
- Fixing sleeve with countersunk type rim dia. 8

## 1. Areas of use

- For use in concrete and solid brick (preliminary tests required in aerated concrete)
- Non-structural and non-safety relevant attachments in construction, metal-working, sanitation and electrical applications for light loads
- Flat washer type rim: Securing brackets, plates, metal sheets, cable ducts and any components for non-recessed installation

## 2. Benefits

- Fast, economic installation
- Pre-assembled, no need to search for the right nail
- For use in through-bolt mounting
- Can be removed with the cross tip drive in screw head


## 3. Properties

- Plastic plug made of high-quality polyamide, making it resistant to rotting
- UV-resistant
- Temperature-resistant from -20°C to +80°C
- Halogen-free

Type Fixing sleeve	Fixing dia. mm	Fixing length mm	Attachment height mm	Collar dia. mm	Drive	Packaging	Art. No.	P. Qty.
FK - flat head	5	35	5	9	Z2	Cartons	<b>5907 105 035</b>	2400/200
	6	40	10	12		Plastic bag	<b>5907 106 040</b>	4000/1000
60		30	Plastic bag			<b>5907 106 060</b>	3000/1000	
SK - counter-sunk head	6	40	10	10		Cartons	<b>5907 206 040</b>	2400/200
		60	30				<b>5907 206 060</b>	1600/200
		80	50				<b>5907 206 080</b>	1200/100
	8	60	20	13			<b>5907 208 060</b>	800/100
		80	40				<b>5907 208 080</b>	800/100
		100	60				<b>5907 208 100</b>	600/100

## Setting instructions

Substrate: Concrete, solid brick

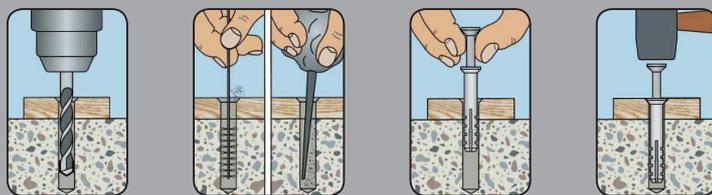

Drill hole

Remove the drilling dust from the drill hole

Insert anchor through the component into the drill hole

Hammer in nail anchor until flush

## Würth system components

