



SAFETY SCREWS

- A special tool is required for mounting and removal.
- Ideal for carrying out installations in schools, hospitals, museums, closed institutions, prisons and security facilities.
- Resistant to removal as a result of vandalism.

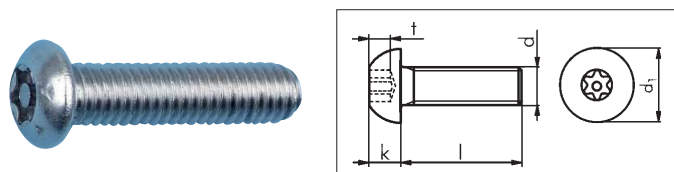

	TX 20	TX 25	TX 30	TX 40
t	M 4	M 5	M 6	M 8
d ₁	7.6	9.5	10.5	14
k	1.95	2.5	3	4.1
t	1.14	1.4	1.52	2.03

Dimension (dia. x l)	A2-70 Art. No.	Drive	PU Qty.
M 4 x 8	0284 4 8	TX 20	100
M 4 x 10	0284 4 10		
M 4 x 16	0284 4 16		
M 4 x 20	0284 4 20		
M 4 x 25	0284 4 25		
M 5 x 8	0284 5 8	TX 25	100
M 5 x 10	0284 5 10		
M 5 x 16	0284 5 16		
M 5 x 20	0284 5 20		
M 5 x 25	0284 5 25		
M 5 x 30	0284 5 30		

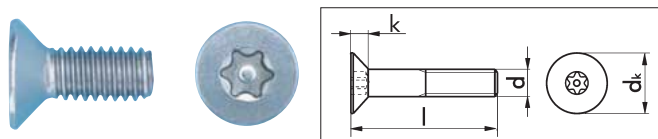

	TX 20	TX 25	TX 30
t	M 4	M 5	M 6
d _k	8	10	12
k	2.3	2.8	3.3

Dimension (dia. x l)	A2-70 Art. No.	Drive	PU Qty.
M 4 x 10	0284 04 10	TX 20	1,000
M 4 x 12	0284 04 12		
M 4 x 16	0284 04 16		
M 4 x 20	0284 04 20		
M 5 x 12	0284 05 12	TX 25	500
M 5 x 16	0284 05 16		
M 5 x 20	0284 05 20		
M 5 x 25	0284 05 25		

- Mechanical engineering – to safeguard safety switches and safety systems against removal.
- Electronics – safety cabinets/switch cabinets.
- Also suitable for outdoor use as made from stainless steel A2 material.
- Bits Art. No. 0614 352 6..

Round pan head similar to ISO 7380 with TX drive and locking pin

A2-70

Dimension (dia. x l)	A2-70 Art. No.	Drive	PU Qty.
M 6 x 8	0284 6 8	TX 30	100
M 6 x 12	0284 6 12		
M 6 x 16	0284 6 16		
M 6 x 20	0284 6 20		
M 6 x 25	0284 6 25		
M 6 x 30	0284 6 30	TX 40	100
M 6 x 40	0284 6 40		
M 8 x 20	0284 8 20		
M 8 x 25	0284 8 25		
M 8 x 30	0284 8 30		
M 8 x 40	0284 8 40		

Can be stored in ORSY® system

With countersunk head similar to DIN 7991 (ISO 10642) with TX drive and locking pin

A2-70

Dimension (dia. x l)	A2-70 Art. No.	Drive	PU Qty.
M 5 x 30	0284 05 30	TX 25	500
M 5 x 40	0284 05 40		200
M 5 x 50	0284 05 50		200
M 6 x 20	0284 06 20	TX 30	200
M 6 x 25	0284 06 25		
M 6 x 30	0284 06 30		
M 6 x 40	0284 06 40		

Can be stored in ORSY® system