


VARIFIX® C-MOUNTING RAIL 40/45


Continuous hot-dip galvanised

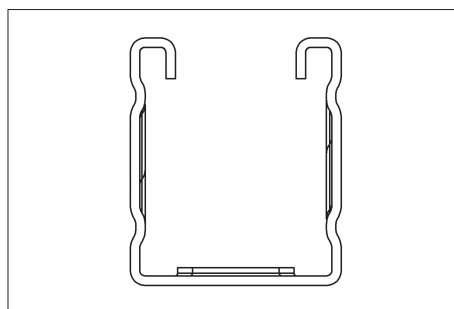

Lower weight at the same or higher load bearing capacity in comparison to mounting rails 41/41/2.5

No restrictions in daily use, plus simpler handling, transport and installation.

High-strength material (HX420 LAD + Z275) combined with distinct diamond beading and continuous punching for utmost stability.

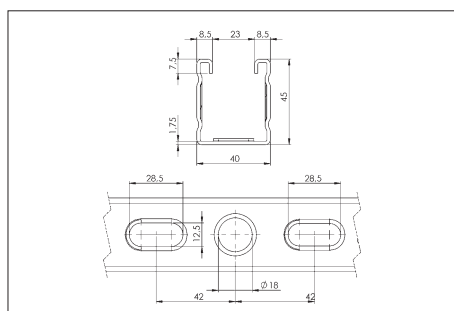

Universal hole pattern with 12.5 x 30 mm slots and 18 mm round holes

Can be used for M16 threaded rods



All connection, installation and securing components for 41-mm rail profile are easy to install.

Rail profile	Length mm	Weight kg/m	Art. no.	PU/m
40/45/1.75	2,000	1.97	0862 001 680	10
	3,000		0862 001 681	15
	6,000		0862 001 684	24

RAIL END PLUGS



For rail type	Art. no.	PU pcs.
26/18	0862 005 001	50
26/26	0862 005 002	
28/28	0862 005 003	
36/36	0862 005 004	
41/22	0862 005 005	
41/44*		
41/41	0862 005 006	
41/82*		
41/62	0862 005 007	
41/124*		
40/45	0862 005 008	

* Two pieces required for each rail end

- Suitable for C-mounting rails
- Material: PE
- Colour: black

Note:

Detailed information on the overview of VARIFIX® installation rails.