



Outside dia. in mm	Length in mm	Inside thread	Art. No.	P. Qty.
8	8	M4	0376 04 8	250
	10		0376 04 10	
10	12	M 5	0376 05 10	
	14		0376 05 12	
	10	M 6	0376 06 10	
	11		0376 06 11	
12	13		0376 06 13	
	15		0376 06 15	
	18		0376 06 18	
	14	M8	0376 08 14	100
14	15		0376 08 15	
	18		0376 08 18	
	23		0376 08 23	
16	15	M10	0376 010 15	250
	20		0376 010 20	
	25		0376 010 25	
22	20	M12	0376 012 20	

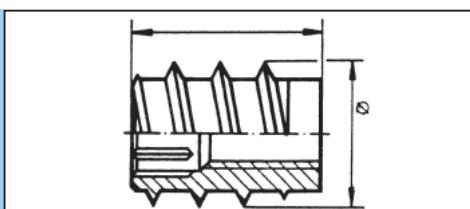

Outside dia. in mm	Length in mm	Inside thread	Allen head	Art. No.	P. Qty.
10	10	M5	5 mm	0376 15 10	250
	12			0376 15 12	
12	15	M6	6 mm	0376 16 12	
	18			0376 16 15	
14	15	M8	8 mm	0376 18 15	
	18			0376 18 18	
16	23			0376 18 23	
18.5	20		10 mm	0376 110 20	
	25	M10		0376 110 25	

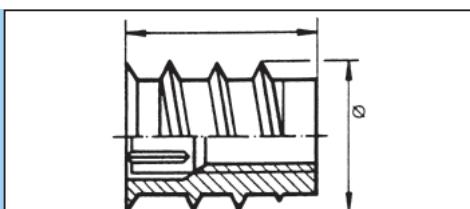

Outside dia. in mm	Length in mm	Inside thread	Allen head	Art. No.	P. Qty.
8	10	M4	4 mm	0376 24 10	250
10	12	M5	5 mm	0376 25 12	
12	12	M6	6 mm	0376 26 12	
	15			0376 26 15	
14	15		8 mm	0376 28 15	
	18	M8		0376 28 18	
18.5	20	M10	10 mm	0376 210 20	
	25	M12		0376 212 25	100

Coupling Sleeve

- Bare steel.
- Connection can be separated as often as desired.
- Fast screwing into holes with hand, electric and pneumatic tools.
- Sharp self-cutting outside thread.

Type B

- With slot.

Type SK

- With Allen head.

Type SKD

- With Allen head and shoulder.

Note

Please use the corresponding bits (Art. Pre-No. 0614) as screw-in tools.