
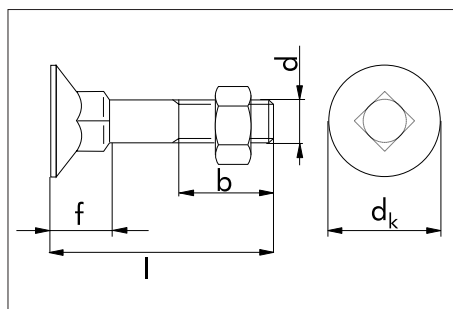


COUNTERSUNK HEAD SCREW

with low square neck and nut

DIN 608
(tapering head bolts)

Steel 08.8 bare

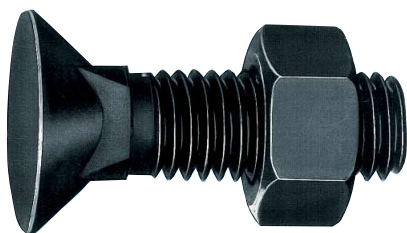

Attention: Screws only suitable for limited loading, see DIN EN ISO 898-1:2009 (this conversion only concerns a change with regard to the marking and designation of the property class).

Thread dia. d	M10	M12
d _k in mm	19.65	24.65
f in mm	8.45	11.05
	90° countersunk head	90° countersunk head
b in mm	26	30

Thread dia. d	l in mm	Bare steel 08.8 Art. No.	P. Qty.
M10	25	0228 10 25	100
M10	30	0228 10 30	100
M10	35	0228 10 35	100
M10	40	0228 10 40	100
M10	50	0228 10 50	100
M10	60	0228 10 60	100
M12	30	0228 12 30	100
M12	35	0228 12 35	100
M12	40	0228 12 40	100
M12	45	0228 12 45	100
M12	50	0228 12 50	100
M12	55	0228 12 55	100
M12	60	0228 12 60	50
M12	70	0228 12 70	50
M12	80	0228 12 80	50
M12	90	0228 12 90	50
M16	45	0228 16 45	50
M16	50	0228 16 50	50
M16	60	0228 16 60	25