



SELF-TAPPING piasta® FACADE SCREWS

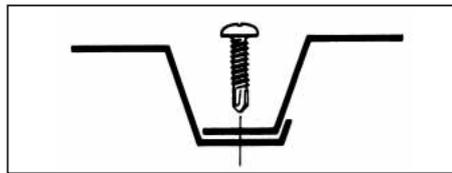

dia. 4.2 and 4.8

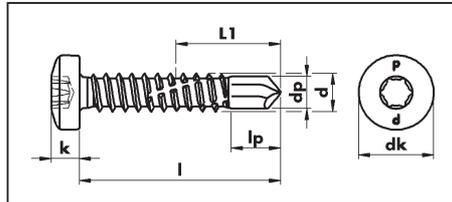

ETA-10/0184

dia. 4.2 and 4.8:
General Building Approval Z-14.1-4
and Z-14.1-537

Tallow-drop head AW drive

Faster than any twist drill – reduces assembly costs by at least 50%

For screwed splice-piece connections of:

Steel profile panels and aluminum profiles.

- Drilling, threading, screwing-in – all in one step.
- Considerably reduced time and effort.
- Exact drilling diameter for each screw connection, resulting in minimization of thread tolerance → always an optimum connection.
- Avoidance of installation errors.
- Optimum torque transfer thanks to AW drive.
- RUSPERT®-coated bi-metal.

Nominal dia. in mm	Length L in mm	Steel part length L1 mm	Drilling tip dia. dp mm	Head dia. dk mm	Head dia. k mm	Head dia. lp mm	Drilling range in mm	Art. No.	P.Qty.
3.5	16	8	2.9	7.5	2.9	3.0	2.5	0206 835 16	100/1,000
3.5	19							0206 835 19	
4.2	16	9.5	3.4	8.2	3.2	3.2	3.0	0206 842 16	
4.2	19							0206 842 19	
4.2	22							0206 842 22	
4.2	25							0206 842 25	
4.2	32							0206 842 32	
4.2	38							0206 842 38	
4.8	16	8	3.65	9.5	3.7	4.5	2.5	0206 848 16	
4.8	19	9.5	3.0				0206 848 19		
4.8	22	11.5	3.95	9.5	3.7	4.5	4.0	0206 848 22	
4.8	25							0206 848 25	
4.8	32							0206 848 32	
4.8	38							0206 848 38	

Storable in ORSY®

Accessories			
AW Bits			
	Size	Bit 1/4" Art. No.	Bit 5/16" Art. No.
	AW 20	0614 512 0	0614 552 0