


Thread dia. d	d _k in mm	d ₁ in mm	l in mm	l ₁ in mm	n in mm	Brass, nickel-plated Art. No.	P. Qty.
M 4	7	5	7	3	1.2	0392 4 7	100
M 4	9	6	9	5	1.2	0392 4 9	
M 4	7	5	14	8	1.2	0392 4 14	
M 4	7	5	20	13	1.2	0392 4 20	
M 5	9	6	15	9	1.2	0392 5 15	
M 6	10	7.5	15	9	1.6	0392 6 15	

Sleeve Nuts

with raised countersunk head and slot

Brass, nickel-plated

- Sleeve nuts are mainly used to attach fittings, in particular for door escutcheons.

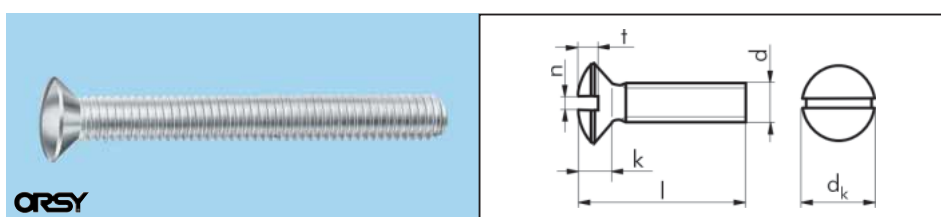

Thread dia.	l in mm	DIN 964 Brass nickel-plated Art. No.	P. Qty.	DIN 964 Steel nickel-plated Art. No.	P. Qty.	DIN 966 Steel, galvanised with Phillips head Art. No.	P. Qty.
M 4	6		250	0044 4 6	500	0049 4 6	100/500
	8			0044 4 8		0049 4 8	100/250/ 1000
	10	0021 4 10		0044 4 10		0049 4 10	
	12	0021 4 12		0044 4 12		0049 4 12	
	16	0021 4 16		0044 4 16		0049 4 16	
	18			0044 4 18	2000	0049 4 18	250
	20	0021 4 20	250	0044 4 20	500	0049 4 20	100/250/1000
	25	0021 4 25		0044 4 25		0049 4 25	100/1000
	30	0021 4 30		0044 4 30		0049 4 30	
	35	0021 4 35		0044 4 35	250	0049 4 35	250
	40	0021 4 40	100	0044 4 40		0049 4 40	100/250
	45		100	0044 4 45		0049 4 45	250
M 5	50	0021 4 50		0044 4 50	100	0049 4 50	100/250
	60			0044 4 60	100	0049 4 60	100
	8		100	0044 5 8	500	0049 5 8	100
	10	0021 5 10		0044 5 10		0049 5 10	100/250/ 1000
	12	0021 5 12		0044 5 12		0049 5 12	
	16	0021 5 16		0044 5 16		0049 5 16	
	20	0021 5 20		0044 5 20		0049 5 20	100/250
	25	0021 5 25		0044 5 25		0049 5 25	
	30	0021 5 30		0044 5 30	250	0049 5 30	100
	35	0021 5 35		0044 5 35		0049 5 35	
	40	0021 5 40		0044 5 40		0049 5 40	
	45	0021 5 45		0044 5 45	500	0049 5 45	
	50	0021 5 50	100	0044 5 50	250	0049 5 50	100
	60	0021 5 60		0044 5 60	100	0049 5 60	
M 6	70	0021 5 70		0044 5 70	200		
	10		100	0044 6 10	500	0049 6 10	100/250
	12			0044 6 12		0049 6 12	250/1000
	16	0021 6 16		0044 6 16		0049 6 16	100/250
	20	0021 6 20		0044 6 20		0049 6 20	100/200
	25	0021 6 25		0044 6 25	100	0049 6 25	100/300
	30	0021 6 30		0044 6 30		0049 6 30	100/200
	35			0044 6 35		0049 6 35	100
	40	0021 6 40	100	0044 6 40		0049 6 40	
	45		100	0044 6 45	100	0049 6 45	
	50	0021 6 50		0044 6 50		0049 6 50	
	60	0021 6 60		0044 6 60		0049 6 60	
	70			0044 6 70		0049 6 70	
	80	0021 6 80	100	0044 6 80		0049 6 80	
	100			0044 6 100			

Raised Countersunk Head Screws

**according to DIN 964
(ISO 2010) with slot**

**Brass, nickel-plated
Steel, nickel-plated**

**according to DIN 966
(ISO 7047) with
Phillips head H**

Steel, nickel-plated

Nominal dia. d	M 4	M 5	M 6
d _k in mm	7.5	9.2	11.0
k in mm	2.2	2.5	3.0
n in mm	1.0	1.2	1.6
t in mm	1.6	2.0	2.4