


## HEXAGONAL BOLT WITH SHANK

ISO 4014 stainless steel A2-50  
and A2-70, plain

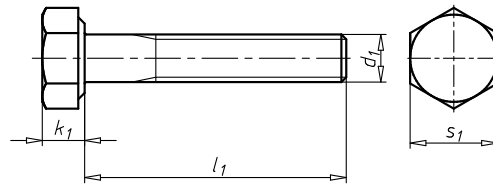

Thread type x nominal diameter (d <sub>1</sub> )	Length (l <sub>1</sub> )	Head height (k <sub>1</sub> )	External drive (s <sub>1</sub> )	Property class	Product class	Art. No.	P. Qty.
M14	60 mm	8.8 mm	WS21	70	A	<b>0095 914 60</b>	25
M14	70 mm	8.8 mm	WS21	70	A	<b>0095 914 70</b>	25
M14	90 mm	8.8 mm	WS21	70	A	<b>0095 914 90</b>	25
M14	110 mm	8.8 mm	WS21	70	A	<b>0095 914 110</b>	25
M14	120 mm	8.8 mm	WS21	70	A	<b>0095 914 120</b>	25
M14	130 mm	8.8 mm	WS21	70	A	<b>0095 914 130</b>	10
M14	140 mm	8.8 mm	WS21	70	A	<b>0095 914 140</b>	10
M16	50 mm	10 mm	WS24	70	A	<b>0095 16 50</b>	25
M16	55 mm	10 mm	WS24	70	A	<b>0095 16 55</b>	25
M16	60 mm	10 mm	WS24	70	A	<b>0095 16 60</b>	25
M16	65 mm	10 mm	WS24	70	A	<b>0095 16 65</b>	25
M16	70 mm	10 mm	WS24	70	A	<b>0095 16 70</b>	25
M16	75 mm	10 mm	WS24	70	A	<b>0095 16 75</b>	25
M16	80 mm	10 mm	WS24	70	A	<b>0095 16 80</b>	25
M16	85 mm	10 mm	WS24	70	A	<b>0095 16 85</b>	25
M16	90 mm	10 mm	WS24	70	A	<b>0095 16 90</b>	25
M16	95 mm	10 mm	WS24	70	A	<b>0095 16 95</b>	25
M16	100 mm	10 mm	WS24	70	A	<b>0095 16 100</b>	25
M16	110 mm	10 mm	WS24	70	A	<b>0095 16 110</b>	25
M16	120 mm	10 mm	WS24	70	A	<b>0095 16 120</b>	25
M16	130 mm	10 mm	WS24	70	A	<b>0095 16 130</b>	25
M16	140 mm	10 mm	WS24	70	A	<b>0095 16 140</b>	25
M16	150 mm	10 mm	WS24	70	A	<b>0095 16 150</b>	10
M16	160 mm	10 mm	WS24	70	B	<b>0095 16 160</b>	10
M16	170 mm	10 mm	WS24	70	B	<b>0095 16 170</b>	10
M16	180 mm	10 mm	WS24	70	B	<b>0095 16 180</b>	10
M16	190 mm	10 mm	WS24	70	B	<b>0095 16 190</b>	5
M16	200 mm	10 mm	WS24	70	B	<b>0095 16 200</b>	5
M16	210 mm	10 mm	WS24	70	B	<b>0095 16 210</b>	5
M16	220 mm	10 mm	WS24	70	B	<b>0095 16 220</b>	5
M16	230 mm	10 mm	WS24	70	B	<b>0095 16 230</b>	5
M16	240 mm	10 mm	WS24	70	B	<b>0095 16 240</b>	5
M16	250 mm	10 mm	WS24	70	B	<b>0095 16 250</b>	5
M16	260 mm	10 mm	WS24	70	B	<b>0095 16 260</b>	5
M16	270 mm	10 mm	WS24	70	B	<b>0095 16 270</b>	5
M16	280 mm	10 mm	WS24	70	B	<b>0095 16 280</b>	5
M16	290 mm	10 mm	WS24	70	B	<b>0095 16 290</b>	25
M16	300 mm	10 mm	WS24	70	B	<b>0095 16 300</b>	5