




ORSY

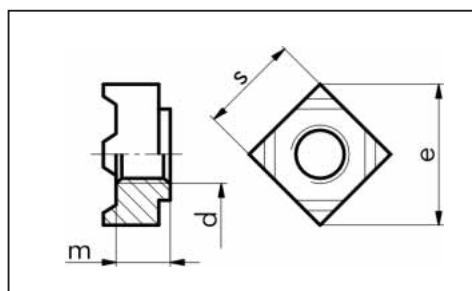


Weldable Flange Nuts DIN 928

Bare steel
with max. C content of 0.25 %
A2

Thread dia. d	m in mm	s in mm	e in mm	Bare steel Art. No.	P. Qty.	A2 Art. No.	P. Qty.
M 4	3.5	7	9	0385 04	100	0306 000 5 0306 000 6 0306 000 8	200
M 5	4.2	9	12	0385 05			
M 6	5	10	13	0385 06			
M 8	6.5	14	18	0385 08			
M 10	8	17	22	0385 010			
M 12	9.5	19	25	0385 012			



ORSY

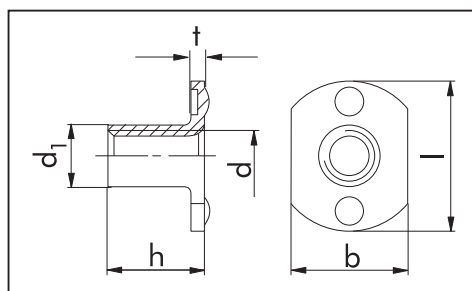

Weldable Flange Nuts


Bare steel
Galvanized steel, blue passivated
(A2K)

Thr. dia. d	d ₁ in mm	l in mm	b in mm	h in mm	t in mm	Qty. Welding projection	Steel, bare Art. No.	P. Qty.	Steel galv., blue pass. Art. No.	P. Qty.
M 4	5	17	9	6	0.9	2	0385 4	100	0385 11	100
M 5	6.4	19	11	7.5	1.2	2	0385 5			
M 6	7.7	22	14	8.5	1.45	2	0385 6			
M 8	10.1	26	18	10	1.8	4	0385 8			
M 10	11.9	26	18	10.5	1.9	4	0385 10			

● Permit high tightening torques.



ORSY

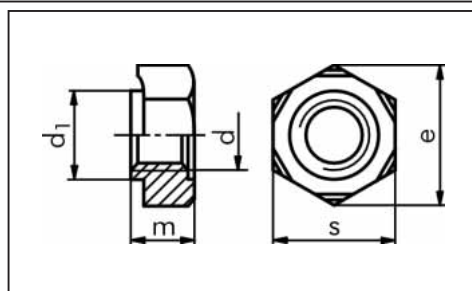

Hex. weld nuts DIN 929

Steel
with max. C content of 0.25 %

Thr. dia d	d ₁ in mm	s in mm	e in mm	m in mm	Steel Art. No.	P. Qty.
M 3	4.5	7.5	8.15	3.0	0399 3	1000
M 4	6	9	9.83	3.5	0399 4	500
M 5	7	10	10.95	4.0	0399 5	
M 6	8	11	12.02	5.0	0399 6	
M 8	10.5	14	15.38	6.5	0399 8	
M 10	12.5	17	18.74	8.0	0399 10	250
M 12	14.8	19	20.91	10.0	0399 12	
M 14	16.8	22	24.27	11.0	0399 14	
M 16	18.8	24	26.51	13.0	0399 16	