


SET SCREWS

DIN EN ISO 4029

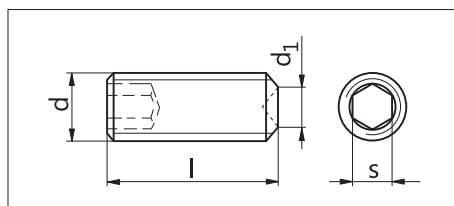

replaces DIN 916

with Allen socket and cup point

A2 stainless steel, 21 H

A4 stainless steel, 21 H



Hardness 21H corresponds to a hardness of 210 HV.

d	M2	M2.5	M3	M4	M5	M6	M8	M10	M12	M16
d ₁ in mm	1	1.2	1.4	2	2.5	3	5	6	8	10
s in mm	0.9	1.3	1.5	2	2.5	3	4	5	6	8

Nominal dia. d	Length l in mm	A2 stainless steel Art. No.	P. Qty.	A4 stainless steel Art. No.	P. Qty.
M2	3	0244 2 3	1,000		
	4	0244 2 4			
	5	0244 2 5			
	6	0244 2 6			
	8	0244 2 8			
	10	0244 2 10			
M2.5	3	0244 25 3	1,000		
	4	0244 25 4			
	5	0244 25 5			
	6	0244 25 6			
	8	0244 25 8			
	12	0244 25 12			
M3	3	0244 3 3	200	0269 93 3	500
	4	0244 3 4		0269 93 4	
	5	0244 3 5		0269 93 5	
	6	0244 3 6		0269 93 6	
	8	0244 3 8		0269 93 8	
	10	0244 3 10		0269 93 10	
	12	0244 3 12		0269 93 12	
	16	0244 3 16			
	20	0244 3 20			
	25	0244 3 25			
M4	3	0244 4 3	200		200
	4	0244 4 4		0269 94 4	
	5	0244 4 5		0269 94 5	
	6	0244 4 6		0269 94 6	
	8	0244 4 8		0269 94 8	
	10	0244 4 10		0269 94 10	
	12	0244 4 12		0269 94 12	
	16	0244 4 16		0269 94 16	
	20	0244 4 20		0269 94 20	
	25	0244 4 25		0269 94 25	
	30	0244 4 30		0269 94 30	

Can be stored in ORSY®

DIN 916 has been retracted and replaced by international standard DIN EN ISO 4029.