


## Snap hook

### DIN 5299 shape C, zinc plated steel

#### Snap hook with concealed coil spring

- The hook cannot be opened when loaded with specified load capacity due to elastic deformation

Standards	DIN 5299
Form	C
Material	Steel
Surface	Zinc plated
RoHS-compliant	Yes

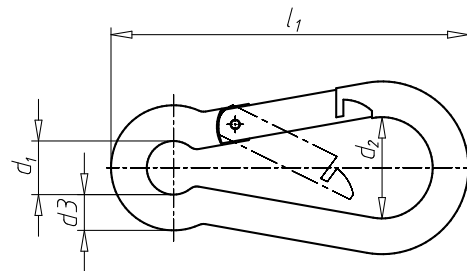

Length (l <sub>1</sub> )	Thickness (d <sub>3</sub> )	Internal diameter (d <sub>1</sub> )	Internal diameter 2 (d <sub>2</sub> )	Max. load capacity	Art. no.	P. Qty.
40 mm	4 mm	6 mm	11 mm	50 kg	<b>0524 40 4</b>	200
50 mm	5 mm	8 mm	15 mm	120 kg	<b>0524 50 5</b>	10
60 mm	6 mm	9 mm	17 mm	120 kg	<b>0524 60 6</b>	10
70 mm	7 mm	10 mm	19 mm	180 kg	<b>0524 70 7</b>	10
80 mm	8 mm	12 mm	23 mm	230 kg	<b>0524 80 8</b>	10
90 mm	9 mm	12 mm	24 mm	250 kg	<b>0524 90 9</b>	5
100 mm	10 mm	15 mm	29 mm	350 kg	<b>0524 100 10</b>	5
120 mm	11 mm	18 mm	36 mm	450 kg	<b>0524 120 11</b>	5
140 mm	12 mm	20 mm	40 mm	510 kg	<b>0524 140 12</b>	5
160 mm	13 mm	22 mm	54 mm	600 kg	<b>0524 160 13</b>	5

Can be stored in ORSY system

### Notice

The load capacity specified in the table is intended to indicate the highest possible load capacity of the snap hooks.