PNEUMATIC BRUSH SANDER

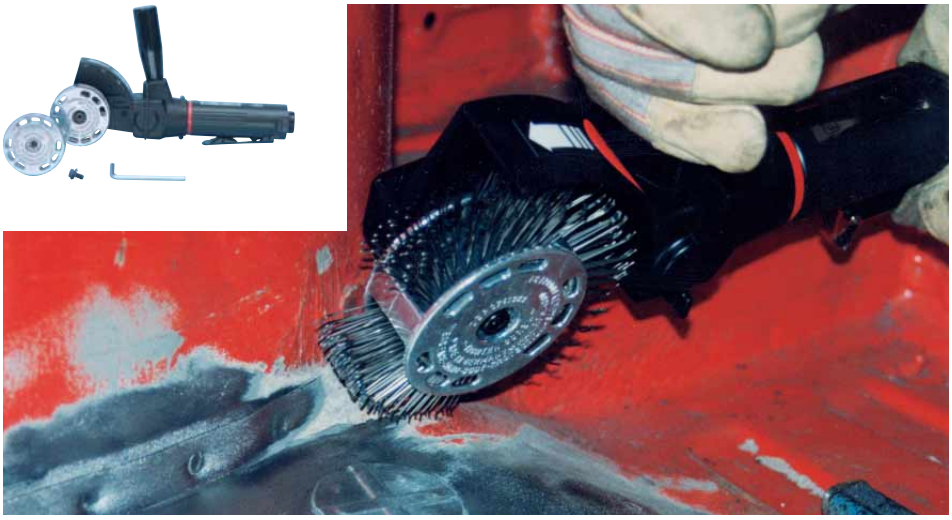

Time-saving system for the removal of underbody protection, sealing compounds, paint, rust and films. Especially ideal for cleaning weld seams when carrying out repairs, paint removal and derusting anywhere on vehicle bodies and for the removal of protective paints on repair sheet metal.

DBS 3500
Art. No. 0703 351 0

The advantages over conventional methods:
(e. g. nylon grinding disks, knotted brushes and flap disks):

- Processed areas are not heated up.
- The tool is not smudged or clogged.
- Longer service life of brushes.
- Considerably quicker working.
- A wide variety of application options thanks to the different brush types (see application examples).
- Very light and handy drive machine.
- 3-year warranty.

Delivery scope

Designation	Delivery scope	Art. No.	P. Qty.
DBS 3500 Pneumatic Brush Sander	1	**0703 351 X**	1
Adapter for wide brush (23 mm) incl. fastening screw, lock washer and 5 mm Allen wrench	1	**0703 350 2**	1
Adapter for narrow brush (11 mm)	1	**0703 350 21**	1

Technical data

Type	Speed in rpm	Operating pressure in bar	Weight in kg	Dimensions (l x w x h) in mm	Average air consumption in L/min	Connection thread	Min. hose width in mm	Art. No.	P. Qty.
DBS 3500	0 – 3,500	6.3	1.1	280 x 71 x 150	110	R 1/4"	9	**0703 351 0**	1

DBS 3500 application examples

- The 23 mm brush belts are especially well suited toward use on larger surfaces.
- The 11 mm brush belts are characterized by their especially good performance and handiness in hard-to-reach areas.

23-mm wide

Art. No. 0703 350 1 P. Qty. 10

The coarse brush belts

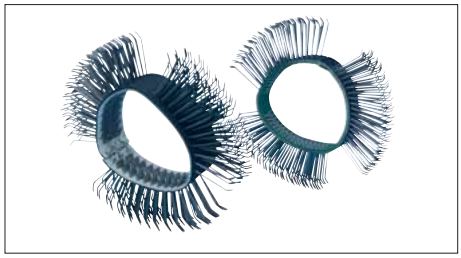

11-mm wide

Art. No. 0703 350 51 P. Qty. 10

Application: Removal of underbody protection and sealing compounds and for quick paint removal. Especially suitable in weld seam, contour and edge areas. Sand-blasting effect ensures a good adhesive base for tinning and filling.

23-mm wide

Art. No. 0703 350 3 P. Qty. 5

Application: Derusting and cleaning work, removal of sealings on gray cast iron. Not for aluminum or die-cast aluminum!

The fine brush belts

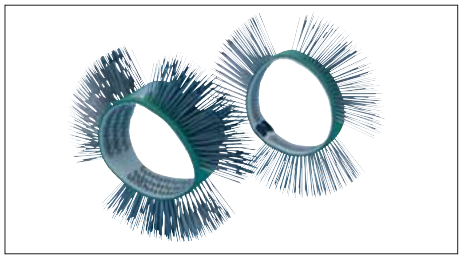

11-mm wide

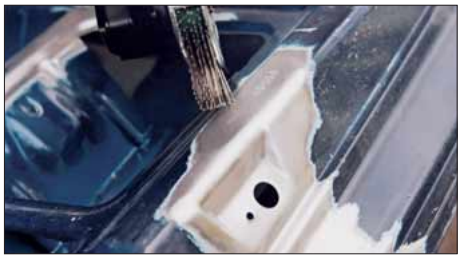

Art. No. 0703 350 31 P. Qty. 5

Application: Paint removal in contours and sharp-edged areas with a 90° angle. No sand-blasting

KR - 07/10 - 05539 - ©