



# Cable Jacket Cutter

- For removing all insulation layers from cables of dia. 25 mm or more.
- Cutting depth adjustable from 0 – 5 mm.
- Replaceable blade (can be used on both sides).

## Instructions for use

### Stripping method:


- With the help of the adjustment screw, it is possible to adjust the cutting depth (0 – 5 mm) to the respective outer jacket.
- At the start of each longitudinal or cross cut, guide the blade by gently pressing on it with the finger. (Figure 1, 4, 8 and 10).
- The outer insulation is cut by using slight lever movements and at the same time pressing the teeth onto the insulation. (Figure 2, 5 and 10).
- The blade can always be changed over between longitudinal and circular cutting. (Figure 3, 8 and 10).
- In the "adapter" stripping process, the tip of the blade must be gently pressed into the outer insulation. (Figure 7).

### Blade replacement:

- The blade can be replaced by unscrewing and tightening the adjustment screw.
- Every blade can be used on both sides. (Figure 12).

| Assembly                                            | Weight in g | Art. No.           | P. Qty. |
|-----------------------------------------------------|-------------|--------------------|---------|
| Complete with plastic case and instructions for use | 219         | <b>0714 41 09</b>  | 1       |
| Spare blade                                         | 5           | <b>0714 41 091</b> |         |

## Stripping method: Cable end

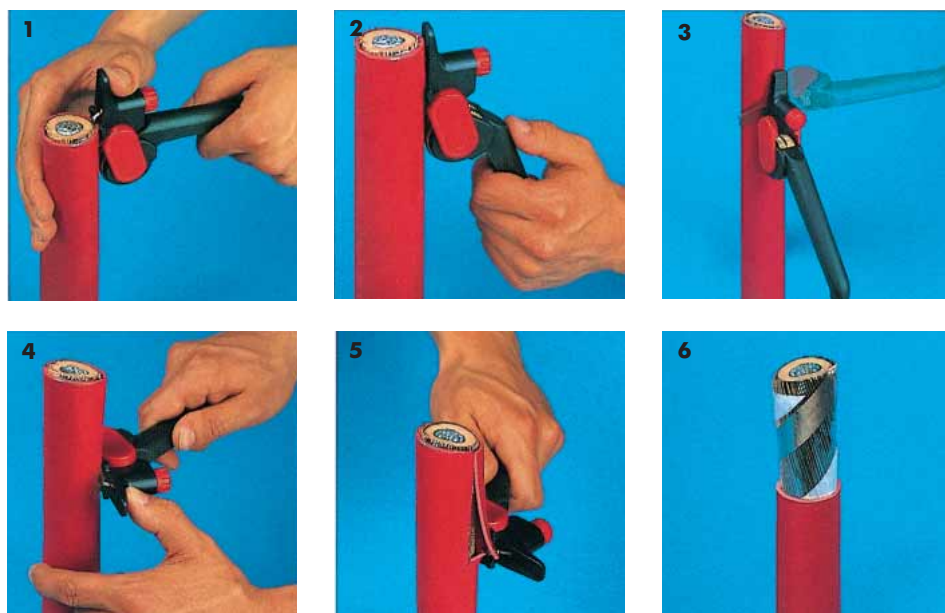

## Stripping method: Adapter

