


THREADED FITTING



Compatible with ORSY storage system

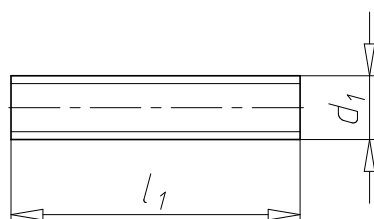

DIN 976-1 (shape A), galvanised steel 4.8, blue passivated (A2K)

Thread type x nominal diameter (d ₁)	Length (l ₁)	Art. No.	P. Qty.
M10	450 mm	0958 910 450	20
M10	500 mm	0958 910 500	50
M10	600 mm	0958 910 600	50
M10	950 mm	0958 910 950	25
M12	30 mm	0958 912 30	100
M12	40 mm	0958 912 40	25
M12	50 mm	0958 912 50	25
M12	55 mm	0958 912 55	100
M12	60 mm	0958 912 60	25
M12	70 mm	0958 912 70	25
M12	80 mm	0958 912 80	25
M12	90 mm	0958 912 90	25
M12	100 mm	0958 912 100	25
M12	110 mm	0958 912 110	25
M12	120 mm	0958 912 120	25
M12	130 mm	0958 912 130	25
M12	140 mm	0958 912 140	25
M12	150 mm	0958 912 150	25
M12	155 mm	0958 912 155	50
M12	160 mm	0958 912 160	25
M12	170 mm	0958 912 170	25
M12	175 mm	0958 912 175	10
M12	180 mm	0958 912 180	25
M12	190 mm	0958 912 190	25
M12	200 mm	0958 912 200	25
M12	205 mm	0958 912 205	10
M12	240 mm	0958 912 240	20
M12	250 mm	0958 912 250	25
M12	300 mm	0958 912 300	50
M12	400 mm	0958 912 400	25
M16	50 mm	0958 916 050	50
M16	60 mm	0958 916 60	100
M16	70 mm	0958 916 070	100
M16	80 mm	0958 916 080	50
M16	90 mm	0958 916 090	1
M16	100 mm	0958 916 100	50
M16	120 mm	0958 916 120	50
M16	150 mm	0958 916 150	25
M16	160 mm	0958 916 160	50
M16	180 mm	0958 916 180	15
M16	200 mm	0958 916 200	100
M16	220 mm	0958 916 220	50
M16	250 mm	0958 916 250	50
M16	280 mm	0958 916 280	10