
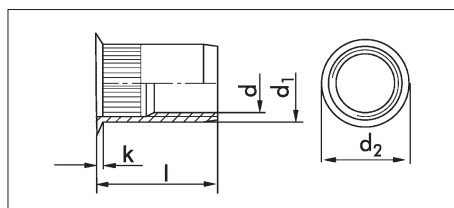


RIVET NUTS

Small countersunk head
Material: stainless steel A2



Thread dia. d	Drill hole dia. in mm	Length l in mm	Clamping range in mm	d ₂ in mm	k in mm	d ₁ in mm	Tightening torque in Nm	Shear fracture load in N	Tensile fracture load in N	Art. No.	P. Qty.
M4	6.0	10.0	0.5 - 3.0	7.0	0.9	5.9	9.0	2,940	6,860	0942 140 0	100
M5	7.0	11.5	0.5 - 3.0	8.0	0.9	6.9	10.5	4,030	11,760	0942 150 0	100
M6	9.0	14.0	0.5 - 3.0	10.0	0.9	8.9	21.0	5,230	18,620	0942 160 0	100
M8	11.0	15.5	0.5 - 3.0	12.0	0.9	10.9	31.0	5,400	25,480	0942 180 0	50
M10	13.0	19.5	0.8 - 3.5	14.5	1.1	12.9	32.0	5,880	33,320	0942 110 0	50