

THIN-WALLED HEAT-SHRINK HOSE

Shrink rate 2:1 without internal adhesive

Dispenser box
175 x 165 x 35 mm

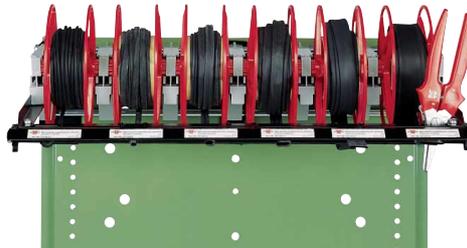


Illustration only

Dielectric strength	20 kV/mm
Min./max. shrinkage temperature	90 to 200 °C
Min./max. temperature conditions	-55 to 135 °C
Material	Polyolefin
Flame-retardant	Yes

Colour	Diameter	Diameter (shrunk)	Sleeve-wall thickness when shrunk	Art. No.	P. Qty.
Black	1.6 mm	0.8 mm	0.36 mm	0771 750 001	10
Black	2.4 mm	1.2 mm	0.43 mm	0771 750 002	10
Black	3.2 mm	1.6 mm	0.43 mm	0771 750 003	10
Black	4.8 mm	2.4 mm	0.43 mm	0771 750 004	10
Black	6.4 mm	3.2 mm	0.56 mm	0771 750 005	5
Black	9.5 mm	4.8 mm	0.56 mm	0771 750 006	5
Black	12.7 mm	6.4 mm	0.56 mm	0771 750 007	5
Black	19.0 mm	9.5 mm	0.69 mm	0771 750 008	5
Black	25.4 mm	12.7 mm	0.76 mm	0771 750 009	5
Blue	1.6 mm	0.8 mm	0.36 mm	0771 750 011	10
Blue	2.4 mm	1.2 mm	0.43 mm	0771 750 012	10
Blue	3.2 mm	1.6 mm	0.43 mm	0771 750 013	10
Blue	4.8 mm	2.4 mm	0.43 mm	0771 750 014	10
Blue	6.4 mm	3.2 mm	0.56 mm	0771 750 015	5
Blue	9.5 mm	4.8 mm	0.56 mm	0771 750 016	5
Blue	12.7 mm	6.4 mm	0.56 mm	0771 750 017	5
Blue	19.0 mm	9.5 mm	0.69 mm	0771 750 018	5
Blue	25.4 mm	12.7 mm	0.76 mm	0771 750 019	5
Red	1.6 mm	0.8 mm	0.36 mm	0771 750 021	10
Red	2.4 mm	1.2 mm	0.43 mm	0771 750 022	10
Red	3.2 mm	1.6 mm	0.43 mm	0771 750 023	10
Red	4.8 mm	2.4 mm	0.43 mm	0771 750 024	10
Red	6.4 mm	3.2 mm	0.56 mm	0771 750 025	5
Red	9.5 mm	4.8 mm	0.56 mm	0771 750 026	5
Red	12.7 mm	6.4 mm	0.56 mm	0771 750 027	5
Red	19.0 mm	9.5 mm	0.69 mm	0771 750 028	5
Red	25.4 mm	12.7 mm	0.76 mm	0771 750 029	5