


HEXAGONAL BOLT FOR HIGH-STRENGTH FITTINGS

**DIN EN 14399-4 steel 10.9,
hot-dip galvanised (TZN)**

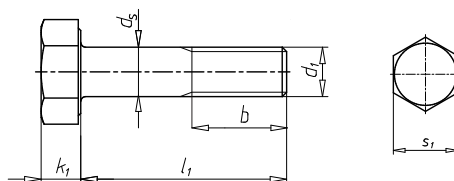

Thread type x nominal diameter (d ₁)	Length (l _f)	Head height (k _f)	External drive (s _f)	Shaft diam- eter (d _s)	Thread length (metric thread) (b)	Pitch	Min./max. pack thickness	Min./max. grip length	Art. No.	P. Qty.
M36	120 mm	23 mm	WS60	36 mm	52 mm	4 mm	66-71 mm	78-83 mm	0079 436 120	1/5
M36	125 mm	23 mm	WS60	36 mm	52 mm	4 mm	71-76 mm	83-88 mm	0079 436 125	1/5
M36	130 mm	23 mm	WS60	36 mm	52 mm	4 mm	76-81 mm	88-93 mm	0079 436 130	1/5
M36	135 mm	23 mm	WS60	36 mm	52 mm	4 mm	81-86 mm	93-98 mm	0079 436 135	1/5
M36	140 mm	23 mm	WS60	36 mm	52 mm	4 mm	86-91 mm	98-103 mm	0079 436 140	1/5
M36	145 mm	23 mm	WS60	36 mm	52 mm	4 mm	91-96 mm	103-108 mm	0079 436 145	1/5
M36	150 mm	23 mm	WS60	36 mm	52 mm	4 mm	96-101 mm	108-113 mm	0079 436 150	1/5
M36	155 mm	23 mm	WS60	36 mm	52 mm	4 mm	101-106 mm	113-118 mm	0079 436 155	1/5
M36	160 mm	23 mm	WS60	36 mm	52 mm	4 mm	106-111 mm	118-123 mm	0079 436 160	1/5
M36	165 mm	23 mm	WS60	36 mm	52 mm	4 mm	111-116 mm	123-128 mm	0079 436 165	1/5
M36	170 mm	23 mm	WS60	36 mm	52 mm	4 mm	116-121 mm	128-133 mm	0079 436 170	1/5
M36	175 mm	23 mm	WS60	36 mm	52 mm	4 mm	121-126 mm	133-138 mm	0079 436 175	1/5
M36	180 mm	23 mm	WS60	36 mm	52 mm	4 mm	126-131 mm	138-143 mm	0079 436 180	1/5
M36	190 mm	23 mm	WS60	36 mm	52 mm	4 mm	136-141 mm	148-153 mm	0079 436 190	1/5
M36	200 mm	23 mm	WS60	36 mm	52 mm	4 mm	146-151 mm	158-163 mm	0079 436 200	1/5
M36	210 mm	23 mm	WS60	36 mm	52 mm	4 mm	156-161 mm	168-173 mm	0079 436 210	1/4
M36	220 mm	23 mm	WS60	36 mm	52 mm	4 mm	166-171 mm	178-183 mm	0079 436 220	1/5
M36	230 mm	23 mm	WS60	36 mm	52 mm	4 mm	176-181 mm	188-193 mm	0079 436 230	1/4
M36	240 mm	23 mm	WS60	36 mm	52 mm	4 mm	186-191 mm	198-203 mm	0079 436 240	1/5
M36	250 mm	23 mm	WS60	36 mm	52 mm	4 mm	196-201 mm	208-213 mm	0079 436 250	1/5